

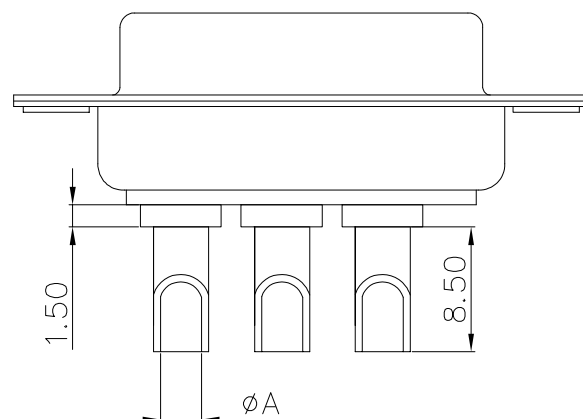
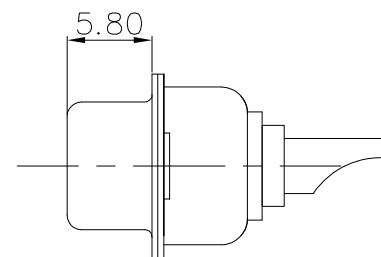


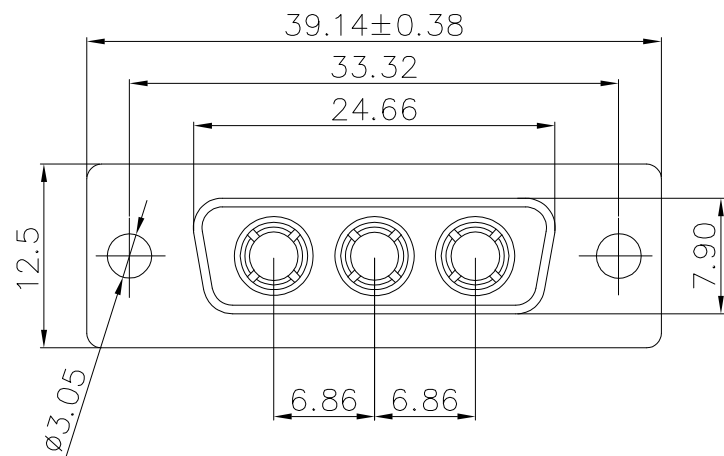

10A, 20A, 30A

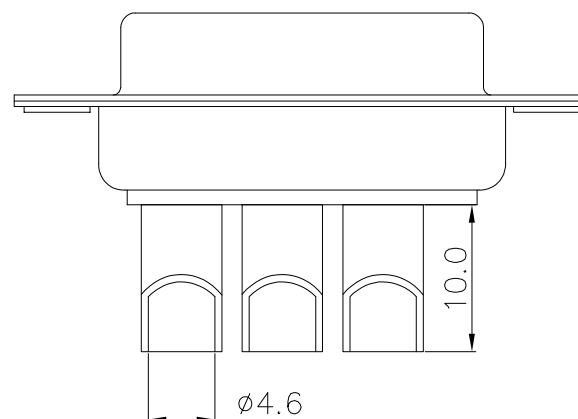

40A

Voltage current rating: 10~40 AMP.
Contact resistance : 2.7 milliohms max.
Dielectric withstanding voltage: 1000V AC
Insulation resistance: 5000MΩ Min.
Temperature range: -55℃ to +125℃
Part number:

B08-3W3411XN-X0

Terminal plating:

4: Full Au 2u"

5: Full Au 1u"

Current rating:

A: 10A, 4.6mm

B: 20A, 4.6mm

C: 30A, 4.6mm

D: 40A, 4.6mm




4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT UL94V-0	Color: black
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

	2023/08/22	Add 40A drawings,Change tolerance	Jack Chen
	2023/08/17	1,Added the terminal plating type 2,Modified operating temperature	Jack Chen
	2013/03/11	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER


QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25
⊙ ◁

NAME:	3W3 female solder,solder cup 8.5mm				PART NO.	B08-3W3411XN-X0	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO B08-006
SCALE:	N:1	DATE:	2013/03/11	Huangmei	Jack Chen		
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		

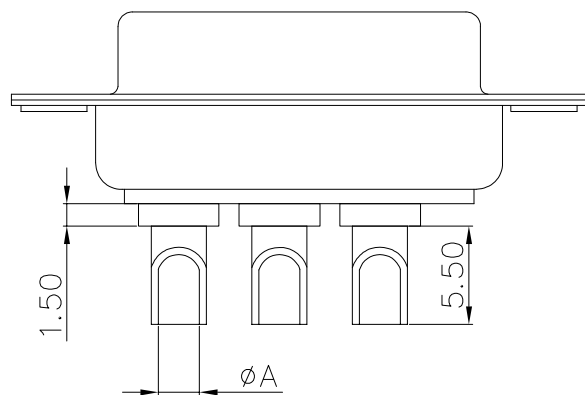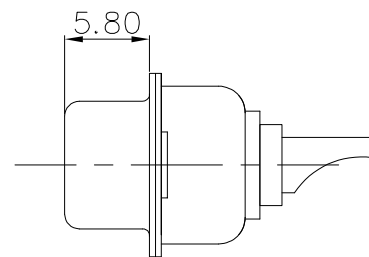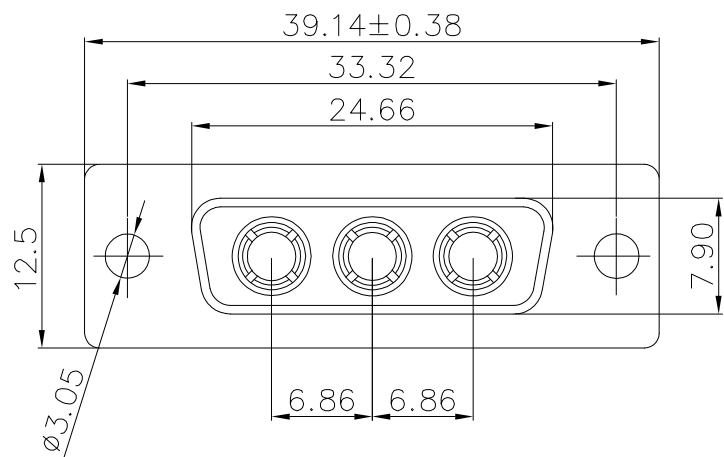

10A,20A,30A

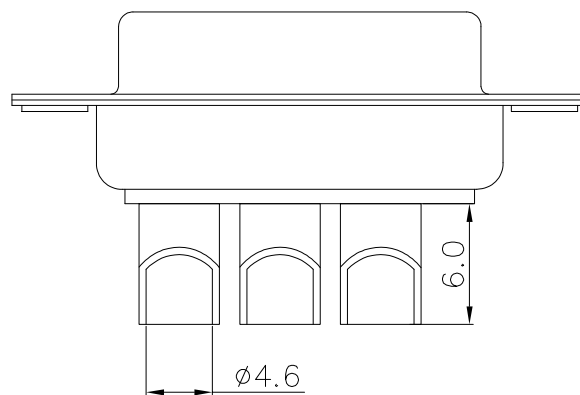

△ 40A

Voltage current rating:10~40 AMP.
Contact resistance : 2.7 milliohms max.
Dielectric withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
△ Temperature range: -55℃ to +125℃
Part number:

B08-3W3411XN-X2
△ Terminal plating:
4: Full Au 2u"
5: Full Au 1u"
Current rating:
A: 10A, ØA 1.7mm
B: 20A, ØA 2.8mm
C: 30A, ØA 3.2mm
D: 40A, ØA 4.6mm

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT UL94V-0	Color: black
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

△	2023/08/22	Add 40A drawings, Change tolerance	Jack Chen
△	2023/08/17	1, Added the terminal plating type 2, Modified operating temperature	Jack Chen
△	2016/09/03	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□ :	☒ :
CRITICAL	MAJOR
▽ :	▽ :
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	3W3 female solder,solder cup 5.5mm				PART NO.	B08-3W3411XN-X2		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2016/09/03	Huangmei	Jack Chen		B08-087	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			