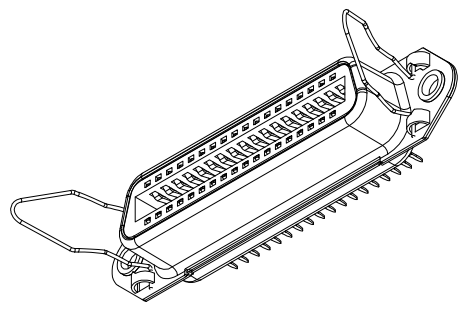

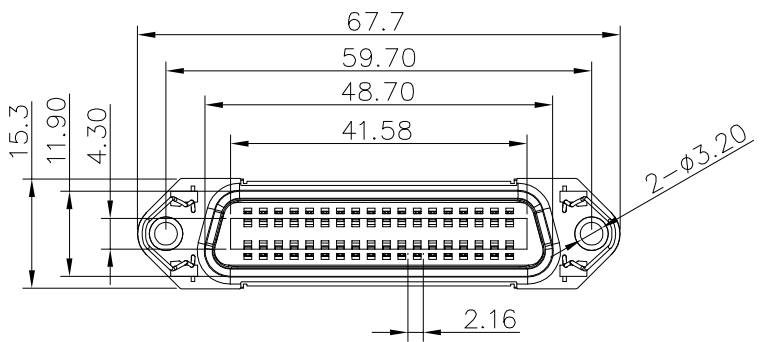


Current rating:5A
Withstanding voltage:250V AC
Contact resistance : 30mΩ max.
Insulation resistance:1000MΩ Min.
Temperature range:-55℃ to +105℃
ROHS compliant
Part number:
B17-0368X1AN-C5
Housing color: _____
1:Black
6:Blue

4	Spring loaded buckle	Steel	Plating:Ni
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: see part no.
2	Sheel	SPCC	Plating:Ni
1	Terminal	Phosphor copper	Contact area:G/F Solder area:Sn Under-plating:Ni
Item	Desc.	Material	Remark

△	2022/09/05	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance		NAME:		PART NO.	
□:	☒:	x.	±0.60	REV:	A	UNIT:	mm
CRITICAL	MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2022/09/05
▽:	▽:	.xx	±0.25			Huangmei	Jack Chen
ZERO DEFECT	S.P.C			lineconn 东莞市林诚塑胶电子有限公司		http://www.lineconn.com	
						TEL:0769-85181660 85181770	
		4	3	2	1		