
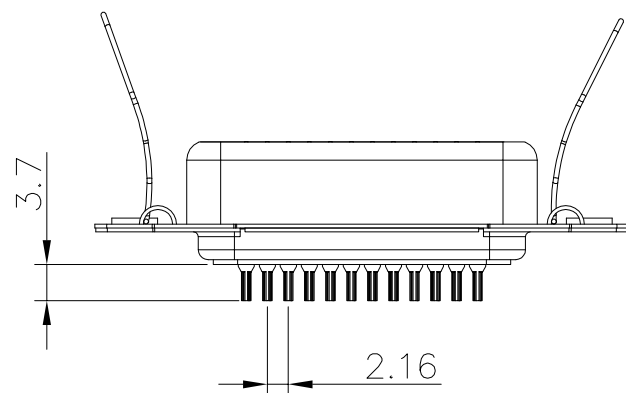
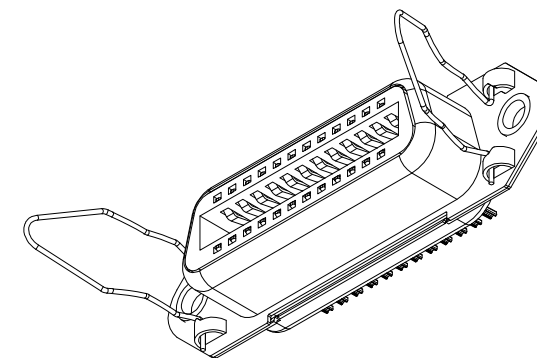
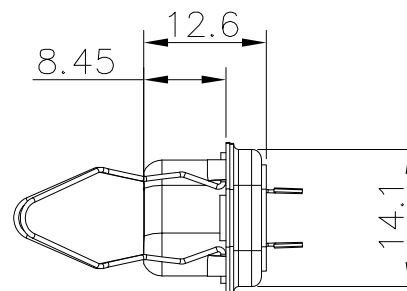


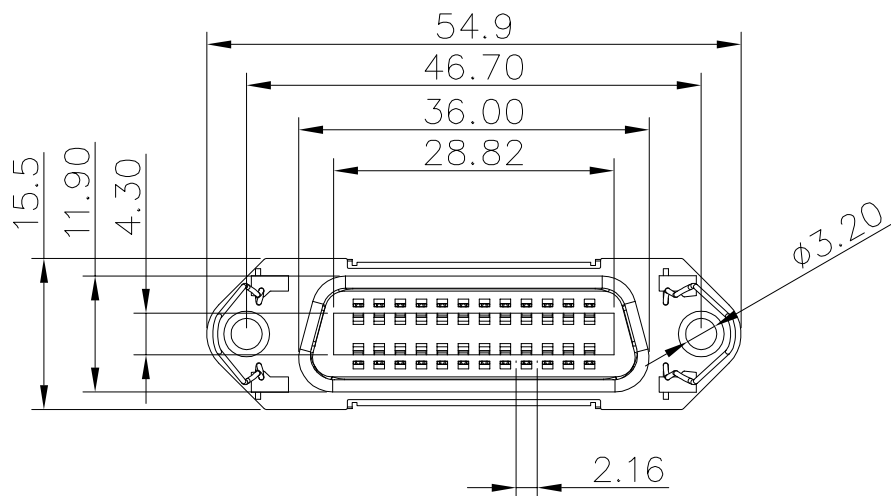

Current rating: 5A
Withstanding voltage: 250V AC
Contact resistance : 30mΩ max.
Insulation resistance: 1000MΩ Min.
△Temperature range: -55℃ to +105℃
ROHS compliant
△Part number:

B17-0244X1AN-S0


Housing color: _____
1: Black
6: Blue

4	Spring loaded buckle	Steel	Plating: Ni
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: see part no.
2	Sheel	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/06/30	Change part number	Jack Chen
△	2017/04/11	Change temperature range	King Zhou
△	2016/10/12	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25



NAME:	Centronics(57) 24pin female solder, with spring loaded buckle				PART NO.	B17-0244X1AN-S0		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2016/10/12	Huangmei	Jack Chen		B17-033	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL: 0769-85181660 85181770