
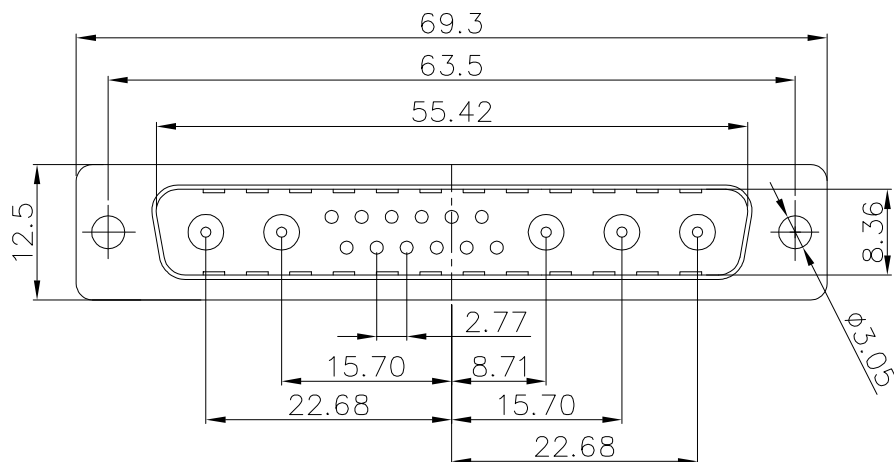


10A,20A,30A

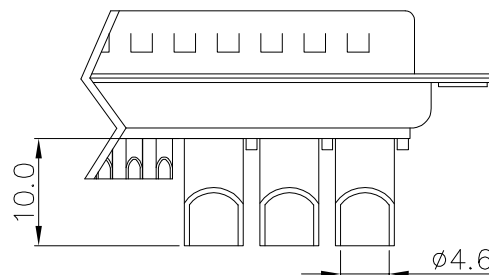

40A

High power terminal:
Voltage current rating:10~40A
Contact resistance: 2.7mΩ max.

Signal terminal:
Voltage current rating:5A
Contact resistance: 10mΩ max.



Withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range:-55°C to +125°C
ROHS compliant

Part number:
B08-AW5311X0-X1

Terminal plating:_____
4:Full Au 2u”
5:Full Au 1u”
Current rating:_____
A:10A,φA 1.7mm
B:20A,φA 2.8mm
C:30A,φA 3.2mm
D:40A,φA 4.6mm

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Terminal plated: see part number
Item	Desc.	Material	Remark

△	2021/09/24	Add 40A drawings,Change tolerance	Carl Hu
△	2015/01/06	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance		NAME:		17W5 male solder,cup 8.5mm		PART NO.		B08-AW5311X0-X1	
□:	☒:	x.	±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
CRITICAL	MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2015/01/06	Huangmei	Shuo Cao		B08-023
▽:	▽:	.xx	±0.25	 东莞市林诚塑胶电子有限公司							
ZERO DEFECT	S.P.C									http://www.lineconn.com TEL:0769-85181660 85181770	