
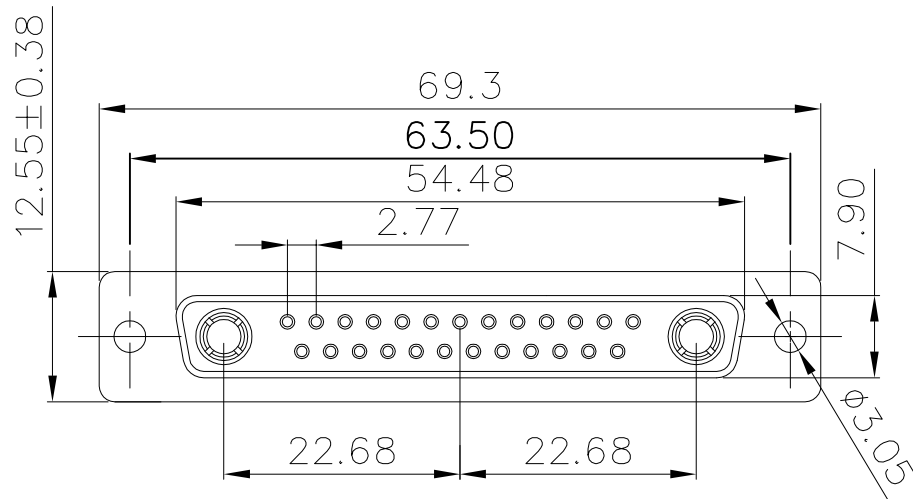


10A,20A,30A

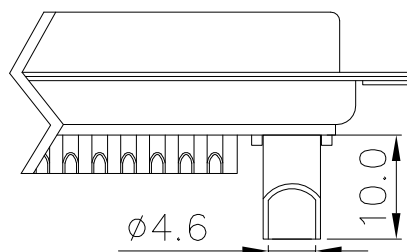

40A

High power terminal:
Voltage current rating:10~40A
Contact resistance: 2.7mΩ max.

Signal terminal:
Voltage current rating:5A
Contact resistance: 10mΩ max.

Withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range:-55℃ to +125℃
ROHS compliant

Part number:
B08-BW2411X0-X1

Terminal plating:
4:Full Au 2u”
5:Full Au 1u”
Current rating:
A:10A,φA 1.7mm
B:20A,φA 2.8mm
C:30A,φA 3.2mm
D:40A,φA 4.6mm

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Terminal plated: see part number
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME:	27W2 female solder,cup 8.5mm			PART NO.	B08-BW2411X0-X1		
△	2021/09/29	Add 40A drawings,Change tolerance	Carl Hu	□: ☒:	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2019/04/19	First edition release	Jack Chen	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2019/04/19	Huangmei	Carl Hu		B08-064
				▽: ▽:	.xx ±0.25								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C									
8	7	6	5	4	3	2	1						

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770