


Pin assignment

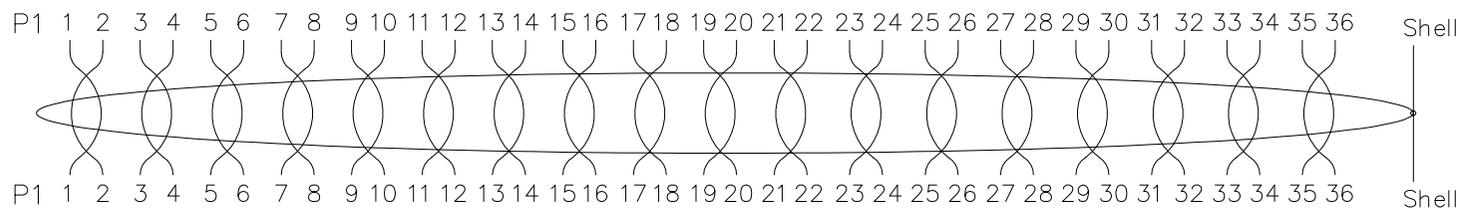

Notes:

1. Electrical test: 100% open, short & miss wire test.
2. Conductor resistance: 5 ohms max.
3. Insulator resistance: 1m ohms min, dc 300v 0.01sec.
4. ROHS compliant
5. Part no. description: A03-03611XXX-04, XXX: 001=length: 10cm

2	Connector	SM 36pin male solder assembly type, black	2set
1	Cable	UL20276 28AWG*18.5P+AL+braid, black, OD: 8.0	NA
Item	Part name	Description	Q'TY


QUALITY SYMBOLS

- : :
 CRITICAL MAJOR
 : :
 ZERO DEFECT S.P.C

Tolerance

Length(mm)	Tolerance(mm)
300~2000	±50
2001~5000	±100
5001~	±150

NAME:	SM(SCSI) 36pin male to male cable			PART NO.	A03-03611XXX-04		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	NONE	DATE:	2009/08/11	Lei Fan	Jing Li		A03-043



lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770

△	2009/08/11	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5