

No. of Contact	A±0.25	B±0.13	C±0.38	D±0.13	E±0.25
15	16.92	24.99	33.98	39.58	33.98
26	25.25	33.32	42.30	47.90	42.30
44	38.96	47.04	56.02	61.62	55.92


Voltage current rating: 5A
 Contact resistance: 15mΩ Max
 dielectric withstanding voltage: 1000V AC
 Insulation resistance: 5GΩ Min.
 Temperature range: -45°C to +105°C
 Waterproof rating: IP67
 ROHS compliant
 Part number:

BA4-0XX3115D-02

No. of contact: _____
 15: 15pin
 26: 26pin
 44: 44pin

6	Epoxy sealant	Epoxy	
5	O-ring	Silicone	
4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Plating: full Au 1u"
Item	Desc.	Material	Remark

△				QUALITY SYMBOLS	Tolerance	NAME:	Waterproof HD.D-SUB male solder, machined pin			PART NO.	BA4-0XX3115D-02		
△				□: ☒:	x. ±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2025/03/24	First edition release	Carl Hu	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2025/03/24	Huangmei	Carl Hu		BA4-012
SIDE	DATE	DESCRIPTION	APPROVER	▽: ▽:	.xx ±0.25								
8	7	6	5	ZERO DEFECT S.P.C									

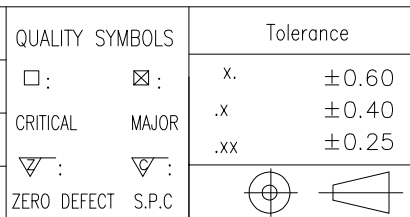


东莞市林诚塑胶电子有限公司
<http://www.lineconn.com>
 TEL: 0769-85181660 85181770