


Current rating: 5 AMP.  
 Contact resistance: 30mΩ MAX  
 Withstanding voltage: 1000V AC  
 Insulation resistance: 5000MΩ Min.  
 Temperature range: -45°C to +105°C  
 Degree of protection: IP67  
 ROHS compliant  
 Part number:

BA4-078411XN-02

Terminal plating:

4: Full Au 2u"

5: Full Au 1u"

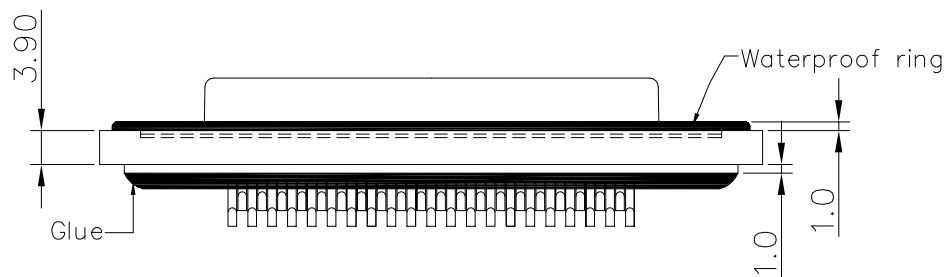

6	Epoxy sealant	Epoxy	
5	O-ring	Silicone	
4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Plating: see part number
Item	Desc.	Material	Remark


QUALITY SYMBOLS

□:      ☒:      CRITICAL      MAJOR

▽:      ▽:      ZERO DEFECT      S.P.C

Tolerance

x.      ±0.60  
 .x      ±0.40  
 .xx      ±0.25



NAME:

Waterproof HD.D-SUB 78pin female solder,machined pin

REV:

A

SCALE:

N:1

UNIT:

mm

DRW BY

Huangmei

DATE:

2023/04/19

CHK BY

Jack Chen

PART NO.

BA4-078411XN-02

APP BY

BA4-010

DRAWING NO.

BA4-010

http://www.lineconn.com

TEL:0769-85181660 85181770

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL:0769-85181660 85181770

2023/04/19 First edition release Jack Chen

SIDE DATE DESCRIPTION APPROVER

8

7

6

5

4

3

2

1