
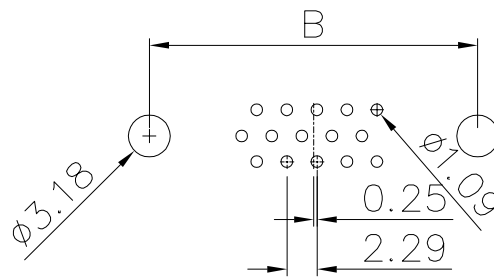


Pin No.	A	B	C±0.38
15	16.70	24.99	39.70
26	25.10	33.32	47.60
44	38.40	47.04	61.80

Current rating: 5A  
 Withstanding voltage: 1000V AC  
 Insulation resistance: 1000MΩ Min.  
 Temperature range: -55°C to +105°C  
 ROHS compliant  
 Part number:

BA4-0XX7X8XD-02

No. of contact: \_\_\_\_\_  
 15: 15pin  
 26: 26pin  
 44: 44pin  
 Housing color: \_\_\_\_\_  
 1: Black  
 5: White  
 6: Blue  
 Terminal plating: \_\_\_\_\_  
 4: Full Au 2u"  
 5: Full Au 1u"

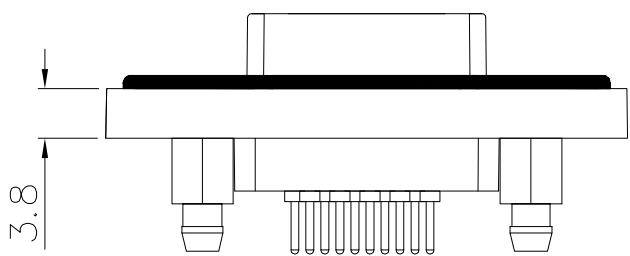

PCB layout

Item	Desc.	Material	Remarks
6	Rivet	Copper alloy	Palting: Sn
5	Board lock	Copper alloy	Palting: Sn
4	Cover	PBT+30%GF	Color: see part no.
3	Housing	PBT+30%GF	Color: see part no.
2	Shell	Zinc alloy	Palting: Ni
1	Terminal	Copper alloy	Palting: see part no.

SIDE	DATE	DESCRIPTION	APPROVER
8	2023/05/13	First edition release	Jack Chen
7			
6			

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	HD.D-SUB machined pin male vertical, zinc alloy shell				PART NO.	BA4-0XX7X8XD-02		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2023/05/13	Huangmei	Jack Chen		BA4-011	
				<a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL: 0769-85181660 85181770				

东莞市林诚塑胶电子有限公司