

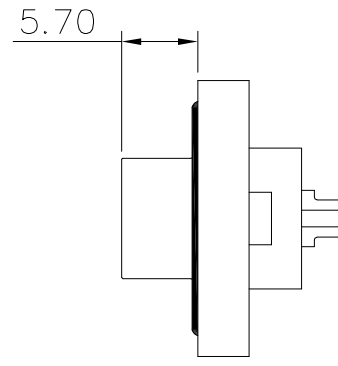


Pin No.	A	B	C±0.38
09	16.70	24.99	39.70
15	25.10	33.32	47.60
25	38.40	47.04	61.80

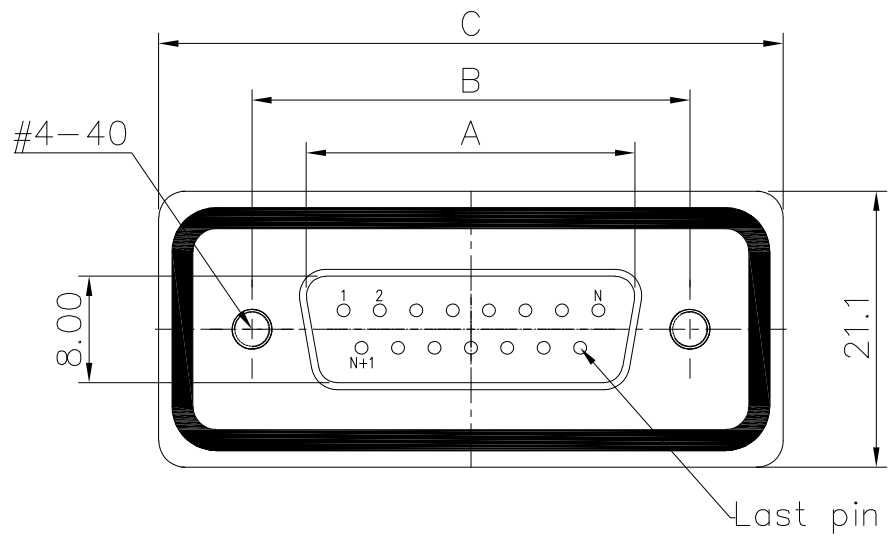

Current rating: 5A
 Withstanding voltage: 1000V AC
 Insulation resistance: 1000MΩ Min.
 Temperature range: -55°C to +105°C
 Waterproof rating: IP67
 ROHS compliant
 Part number:

BA5-0XX318XD-A2
 No. of contact: _____
 09: 09pin
 15: 15pin
 25: 25pin
 Terminal plating: _____
 4: Full Au 2u"
 5: Full Au 1u"

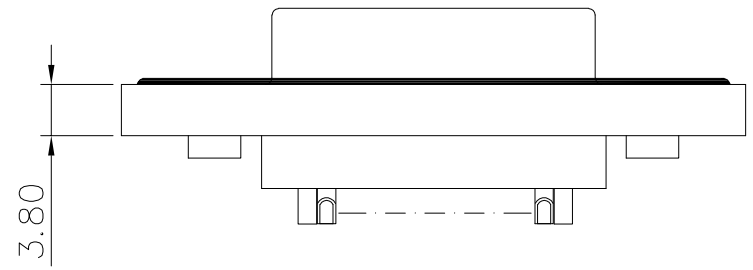

6	Glue	Glue	Color: black
5	Waterproof ring	Rubber	Color: Blue
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

△				QUALITY SYMBOLS	Tolerance	NAME:	D-SUB machined pin male solder, zinc alloy shell			PART NO.	BA5-0XX318XD-A2		
△				□: ☒:	.x ±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2025/11/23	First edition release	Carl Hu	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2025/11/23	Huangmei	Carl Hu		BA5-031
SIDE	DATE	DESCRIPTION	APPROVER	▽: ▽:	.xx ±0.25	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL: 0769-85181660 85181770							
8	7	6	5	4	3	2	1						