Pin No.	A	B	C±0.38
15	16.70	24.99	39.70
26	25.10	33.32	47.60
44	38.40	47.04	61.80

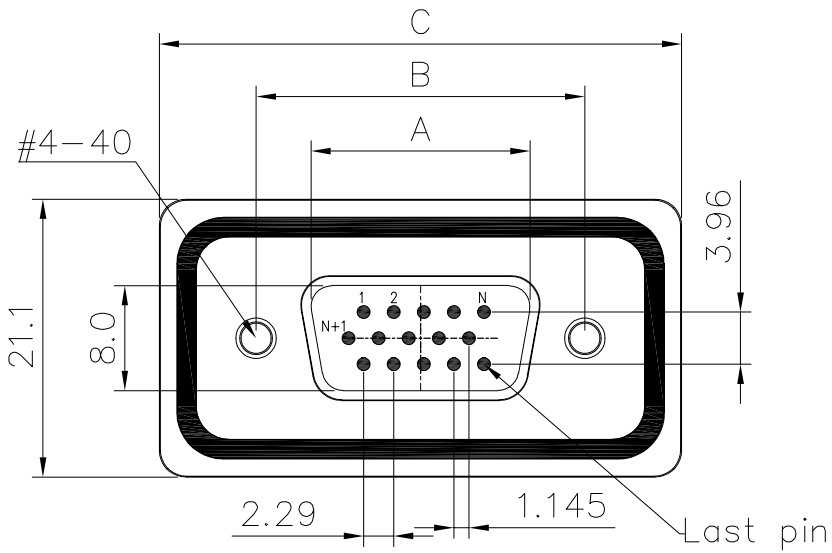

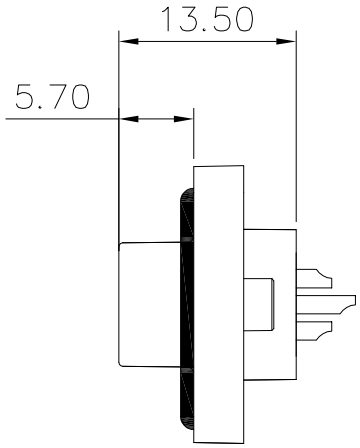

Current rating: 5A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: −55°C to +105°C
Waterproof rating: IP67
ROHS compliant
Part number:
BA4-0XX318XD-A2
No.of contact:
15: 15pin
26: 26pin
44: 44pin
Terminal plating:
4: Full Au 2u"
5: Full Au 1u"

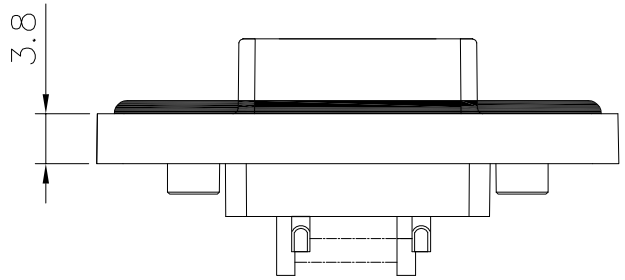

Item	Desc.	Material	Remark
6	Glue	Glue	Color: black
5	Waterproof ring	Rubber	Color: Blue
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Palting: Ni
1	Terminal	Copper alloy	Palting: see part no.

SIDE	DATE	DESCRIPTION	APPROVER
3			
2			
1	2025/04/08	First edition release	Carl Hu

QUALITY SYMBOLS
□: CRITICAL
⊠: MAJOR
▽: ZERO DEFECT
▽: S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25

NAME:	HD.D-SUB machined pin male solder, zinc alloy shell				PART NO.	BA4-0XX318XD-A2	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2025/04/08	Huangmei	Carl Hu		BA4-016

lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769-85181660 85181770