
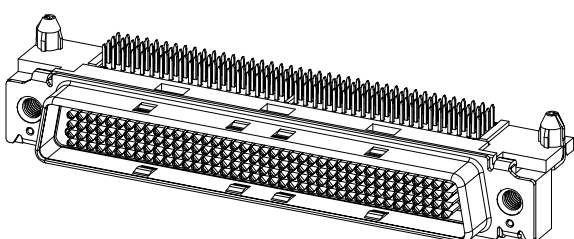
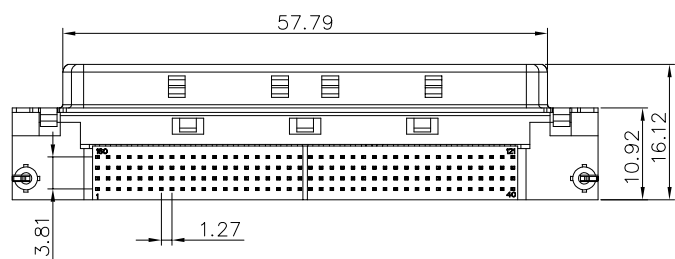
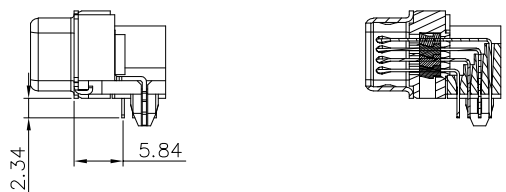


PCB layout

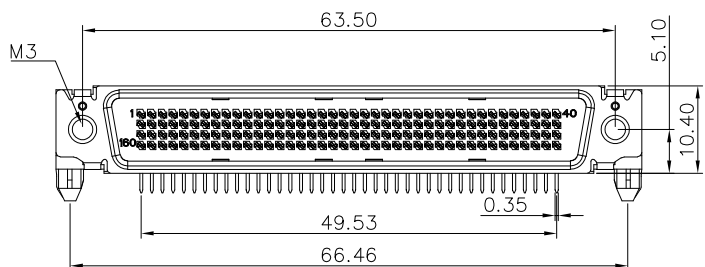

Rated current: 0.30A/contact  
 Dielectric withstanding voltage: 250V AC  
 Insulation resistance: 500MΩ min.  
 Temperature range: -25°C to +105°C  
 ROHS compliant

5	Board lock	Copper alloy	Plating: Ni
4	Cover	LCP UL 94V-0	Color: black
3	Housing	LCP UL 94V-0	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 15u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△				QUALITY SYMBOLS	Tolerance	NAME:	LFH 160pin male right angle DIP type Connector			PART NO.	B04-160511HL-01		
△				□:    ☒:	x.    ±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2023/04/23	First edition release	Carl Hu	CRITICAL    MAJOR	.x    ±0.40	SCALE:	N:1	DATE:	2023/04/23	Huangmei	Carl Hu		B04-086
SIDE	DATE	DESCRIPTION	APPROVER	▽:    ▽:	.xx    ±0.25	lineconn 东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL:0769-85181660 85181770				
8	7	6	5	ZERO DEFECT    S.P.C		4	3	2	1				