



Current rating: 5A
 Withstanding voltage: 500V AC
 Insulation resistance: >1000 mΩ/Min
 Contact resistance: 30mΩ/Max
 Operation temperature: -55°C~+125°C
 ROHS compliant
 Part number:
 B17-C363X1AF-02
 Housing color: _____
 1: black
 6: blue

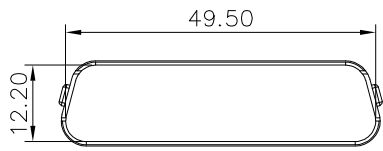

5	Cable clipper	SPCC	Plating: Ni
4	SR	Rubber	Color: color
3	Housing	PBT+30%G.F.(UL 94V-0)	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2022/11/29	Change size	Jack Chen
△	2022/11/08	Added 50pin independent drawing	Jack Chen
△	2014/09/21	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□ :	☒ :	.x	±0.60
CRITICAL	MAJOR	.x	±0.40
▽ :	▽ :	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	Centronics(57) 36pin traditional male solder,with 30 metal hood				PART NO.	B17-C363X1AF-02		
REV:	F	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2014/09/21	Huangmei	Jack Chen	B17-057		
东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770				
8	7	6	5	4	3	2	1	