





Current rating: 5A  
 Withstanding voltage: 500V AC  
 Insulation resistance: >1000 mΩ/Min  
 Contact resistance: 30mΩ/Max  
 Operation temperature: -55°C~+125°C  
 ROHS compliant

Part number:  
 B17-C244X1AF-02

Housing color:   
 1: black  
 6: blue

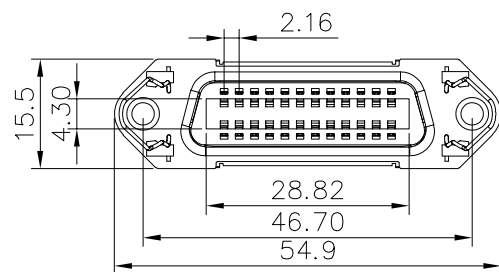

Item	Desc.	Material	Remark
8	Spring	Steel	Plating: Ni
7	Nut	Steel	Plating: Ni
6	Screw	Steel	Plating: Ni
5	Cable clipper	SPCC	Plating: Ni
4	SR	Rubber	Color: color
3	Housing	PBT+30%G.F.(UL 94V-0)	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni

△	2023/05/26	Change size	Carl Hu
△	2022/11/08	Added 24pin independent drawing	Jack Chen
△	2015/01/09	First edition release	Jing Li

QUALITY SYMBOLS		Tolerance	
□ :	☒ :	.x	±0.60
CRITICAL	MAJOR	.x	±0.40
▽ :	▽ :	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	Centronics(57) 24pin female solder, with 60 metal hood				PART NO.	B17-C244X1AF-02		
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2015/01/09	Huangmei	Carl Hu	B17-059		

SIDE	DATE	DESCRIPTION	APPROVER	lineconn 东莞市林诚塑胶电子有限公司		http://www.lineconn.com	
8	7	6	5	4	3	2	1

TEL:0769-85181660 85181770