

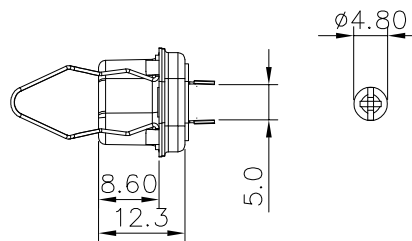


Current rating: 5A
 Withstanding voltage: 500V AC
 Insulation resistance: >1000 mΩ/Min
 Contact resistance: 30mΩ/Max
 Operation temperature: -55°C~+125°C
 ROHS compliant
 Part number:
 B17-C504X1AF-02
 Housing color: _____
 1: black
 6: blue

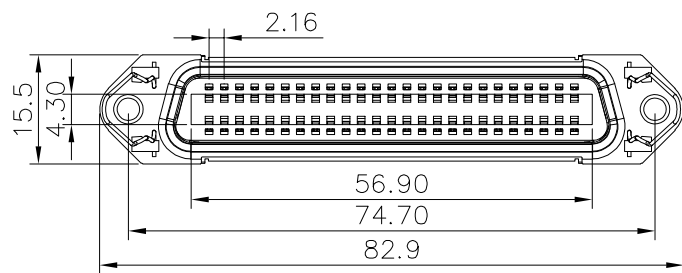

| Item | Desc. | Material | Remark |
|------|---------------|-----------------------|---|
| 8 | Spring | Steel | Plating: Ni |
| 7 | Nut | Steel | Plating: Ni |
| 6 | Screw | Steel | Plating: Ni |
| 5 | Cable clipper | SPCC | Plating: Ni |
| 4 | SR | Rubber | Color: color |
| 3 | Housing | PBT+30%G.F.(UL 94V-0) | Color: see part no. |
| 2 | Shell | SPCC | Plating: Ni |
| 1 | Terminal | Copper alloy | Contact area: G/F Solder area: Sn Under-plating: Ni |

| | | | |
|------|------------|---------------------------------|-----------|
| △ | 2023/05/22 | Change size | Carl Hu |
| △ | 2022/11/14 | Added 24pin independent drawing | Jack Chen |
| △ | 2015/01/09 | First edition release | Jing Li |
| SIDE | DATE | DESCRIPTION | APPROVER |
| 8 | 7 | 6 | |

| QUALITY SYMBOLS | | Tolerance | |
|-----------------|-------|-----------|-------|
| □ : | ☒ : | .x | ±0.60 |
| CRITICAL | MAJOR | .x | ±0.40 |
| ▽ : | ▽ : | .xx | ±0.25 |
| ZERO DEFECT | S.P.C | | |

| NAME: | Centronics(57) 50pin female solder, with 60 metal hood | | | | PART NO. | B17-C504X1AF-02 | | |
|---------------|--|-------|------------|---|----------|-----------------|-------------|--|
| REV: | F | UNIT: | mm | DRW BY | CHK BY | APP BY | DRAWING NO. | |
| SCALE: | N:1 | DATE: | 2015/01/09 | Huangmei | Carl Hu | B17-061 | | |
| 东莞市林诚塑胶电子有限公司 | | | | http://www.lineconn.com TEL:0769-85181660 85181770 | | | | |
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |