
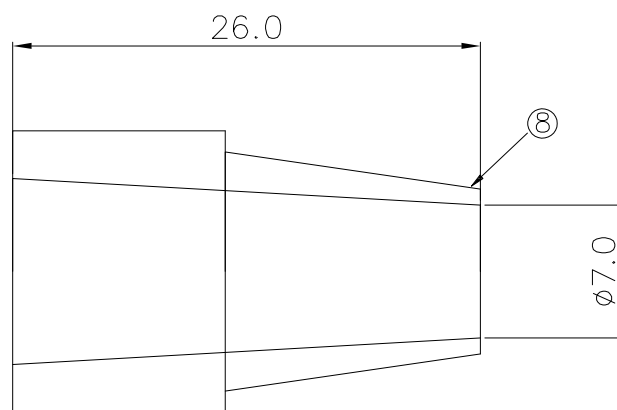

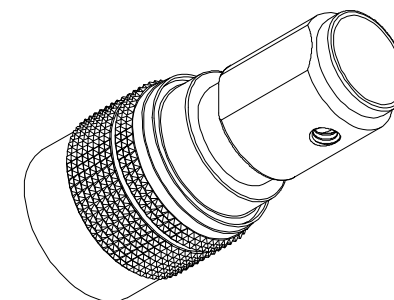
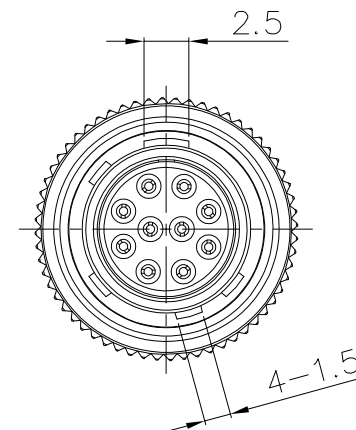
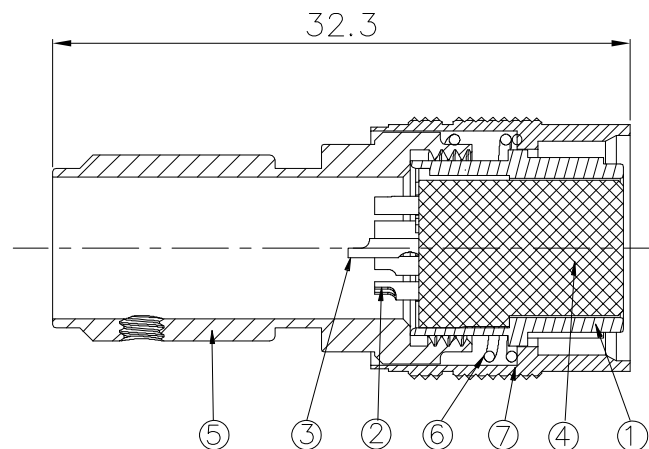


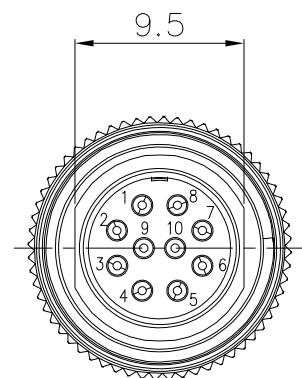

Current rating: 2A
Rated voltage: 100V
Contact resistance: 10mΩ Max.
Durability: 1000 cycles
Temperature range: -25°C to +85°C
ROHS compliant
Waterproof rating: IP67

8	Casing	Rubber	Color: black
7	Shell	Copper	Plating: Ni
6	Spring	QBe1.9	
5	Cable sleeve	Copper	Plating: Ni
4	Housing	PPS	Color: black
3	Terminal	Copper	Plating: Au
2	Terminal	Copper	Plating: Au
1	Shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

△	2022/10/30	Add casing drawings	Carl Hu
△	2020/03/11	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		
		4	

NAME:		HR10A-10P-10S female solder assembly			PART NO.		B10-02PT10SH-KFD	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2020/03/11	Yugong	Carl Hu		B10-080	
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			