

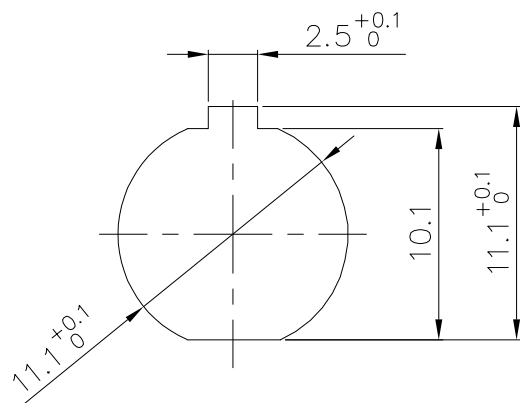
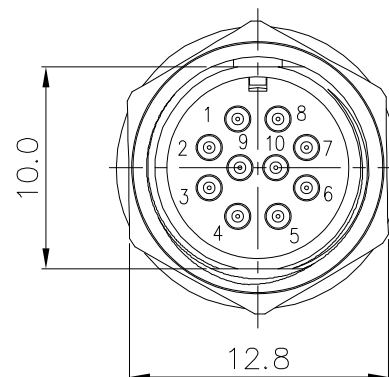
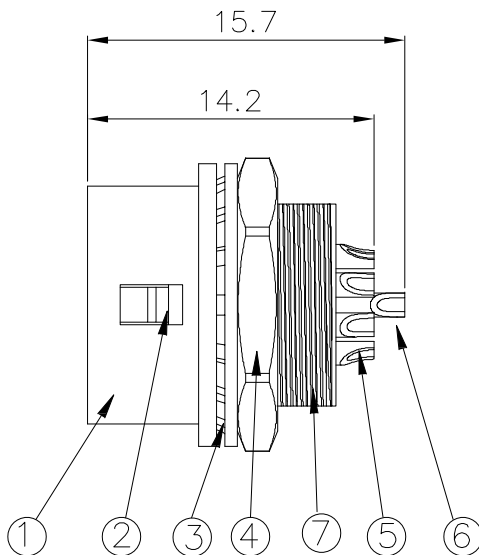


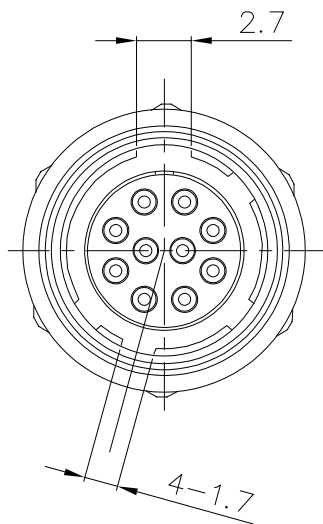

Recommended panel size



Current rating: 2A
Rated voltage: 100V
Contact resistance: 10mΩ Max.
Durability: 1000 cycles
Temperature range: -25°C to +85°C
ROHS compliant
Waterproof rating: IP67

7	Housing	PPS	Color: black
6	Terminals	Copper	Plating: Au
5	Terminals	Copper	Plating: Au
4	Nut	Copper	Plating: Ni
3	Washer	Stainless steels	
2	Locking Spring	QBe1.9	
1	Hood	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

△	2022/01/09	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		
		4	

NAME:		HR10A-10R-10S female solder, rear lock panel			PART NO.		B10-02PZ10SH-KGD	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2022/01/09	Huangmei	Jack Chen		B10-106	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com			
					TEL:0769-85181660 85181770			
3				2		1		