
















8		7		6		5		4		3		2		1	
Pin	2pin	3pin	4pin	5pin(180°)	5pin(240°)	6pin	7pin	8pin	12pin	14pin	16pin	19pin	24pin		
Drawing															
∅	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.50mm	1.00mm	1.00mm	1.00mm	1.00mm	0.50mm		



20.0


∅17.4(M18*0.75)




3.0

20.0

4



∅17.4(M18*0.75)

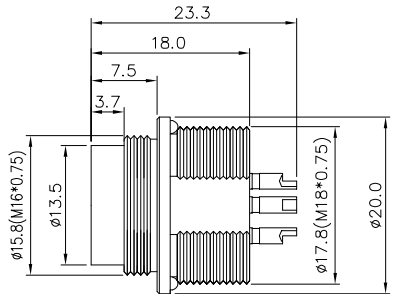

23.3

18.0

7.5


3.7

∅15.8(M16*0.75)

∅13.5

∅17.8(M18*0.75)

20.0



17.00

∅18.10

Recommended Panel Cut-out

Current rating:

2~8pin 5A

12~19pin 3A

24pin 1A

Rated voltage:

2~8pin 250V

12~19pin 60V

24pin 60V

Contact resistance: 10mΩ Max

Temperature range: -25°C to +105°C

Waterproof rating: IP67

ROHS compliant

Part number:

B10-M16X XX32-R6

Code: _____

A: A code


1: A code(180°)

No.of Contact: _____

02: 2pin

~

24: 24pin




∅12.1

∅13.5

∅20.0

∅15.8(M16*0.75)



8.8

0.8

∅12.1


3

5

1

2

Epoxy Resin



16.8

∅17.8(M18*0.75)

∅20.0

5	O-ring	EPDM	Color:red/black
4	Nut	Brass	Plating:Ni
3	Outer contact	Brass	Plating:Ni
2	Terminal	Brass	Plating:Au
1	Housing	PA66+GF	Color:black
Item	Desc.	Material	Remark

A						QUALITY SYMBOLS		Tolerance		NAME:		M16 male solder rear lock panel			PART NO.		B10-M16X XX32-R6		
						□: ☒:		x. ±0.60		REV:		A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
	△	2024/05/09	First edition release			Carl Hu		.x ±0.40		SCALE:		N:1	DATE:	2024/05/09	Huangmei	Carl Hu		B10-190	
								.xx ±0.25											
	SIDE	DATE	DESCRIPTION			APPROVER		ZERO DEFECT S.P.C		 		lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
8		7		6		5		4		3		2		1					