

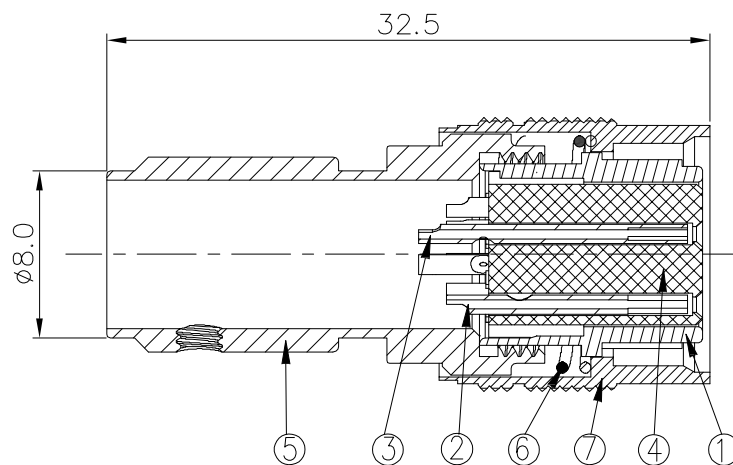
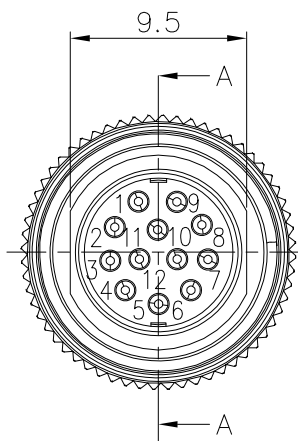



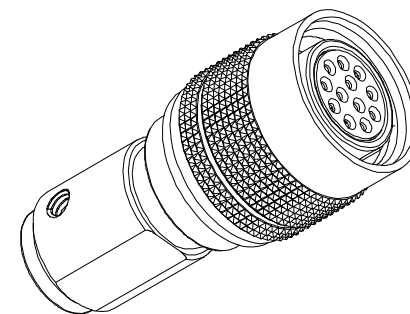


Section: A-A

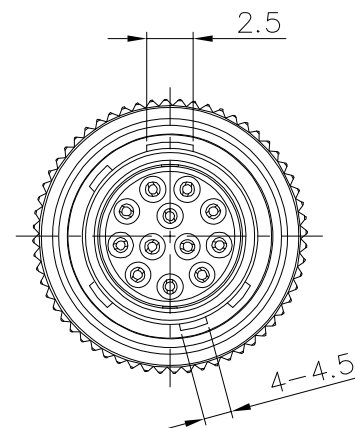

Current rating: 2A  
Rated voltage: 100V  
Contact resistance: 10mΩ Max.  
Durability: 1000 cycles  
Temperature range: -25°C to +85°C  
ROHS compliant  
Waterproof rating: IP67

|      |              |            |              |
|------|--------------|------------|--------------|
| 8    | Casing       | Rubber     | Color: black |
| 7    | Shell        | Copper     | Plating: Ni  |
| 6    | Spring       | QBe1.9     |              |
| 5    | Cable sleeve | Copper     | Plating: Ni  |
| 4    | Housing      | PPS        | Color: black |
| 3    | Terminal     | Copper     | Plating: Au  |
| 2    | Terminal     | Copper     | Plating: Au  |
| 1    | Shell        | Zinc alloy | Plating: Ni  |
| Item | Desc.        | Material   | Remark       |

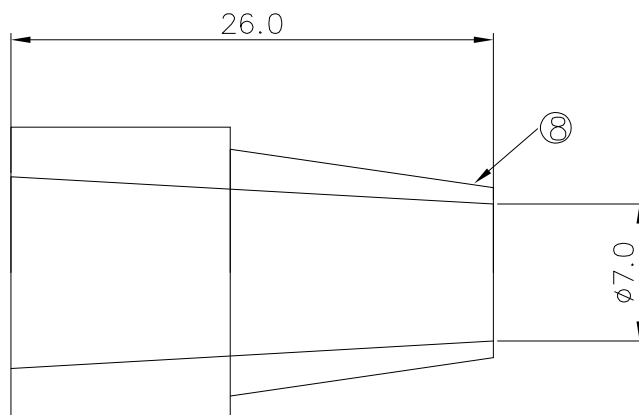

2023/06/09 Change BOM

Carl Hu

QUALITY SYMBOLS

Tolerance

NAME:

HR10A-10P-12S female solder assembly

PART NO.

B10-02PT12SH-KFD

2023/05/20 Add the rubber sheathing figure

Jack Chen

CRITICAL MAJOR

x. ±0.60

REV:

C

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

2018/03/11 First edition release

Jack Chen

ZERO DEFECT S.P.C

.x ±0.40

SCALE:

N:1

DATE:

2018/03/11

Yugong

Carl Hu

B10-037

SIDE

8

DATE

7

DESCRIPTION

APPROVER

6

QUALITY SYMBOLS

5

Tolerance

4

NAME:

3

HR10A-10P-12S female solder assembly

2

PART NO.

1

B10-02PT12SH-KFD

TEL:0769-85181660 85181770

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com