
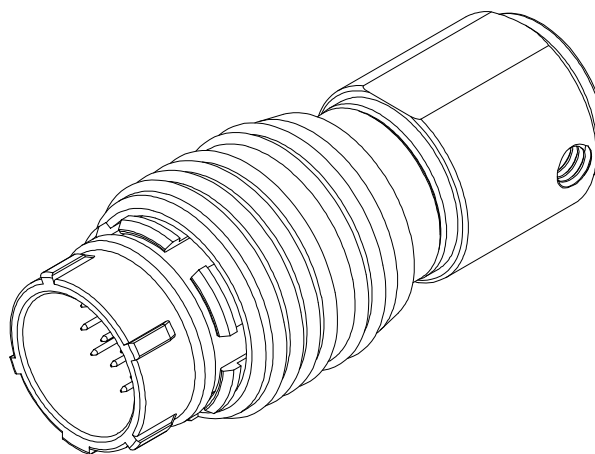
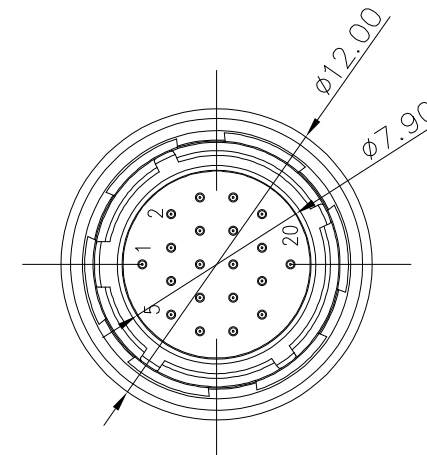
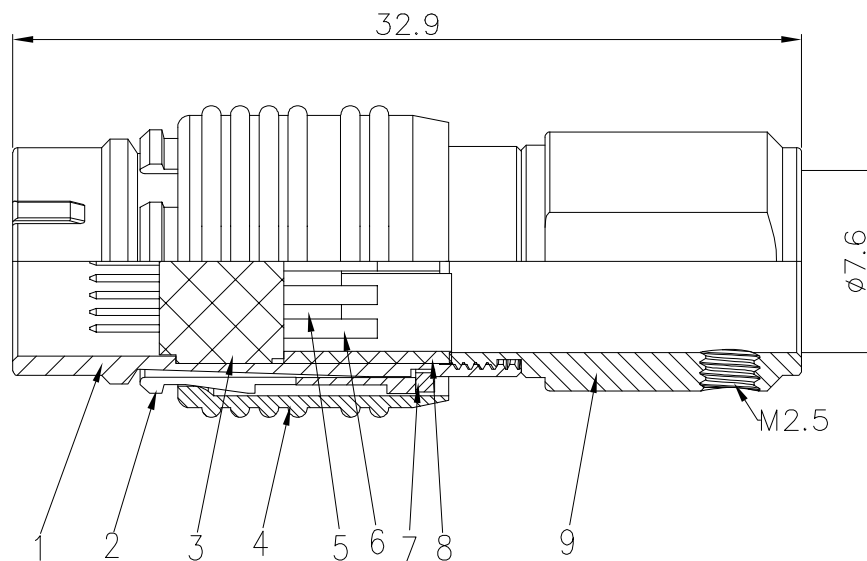


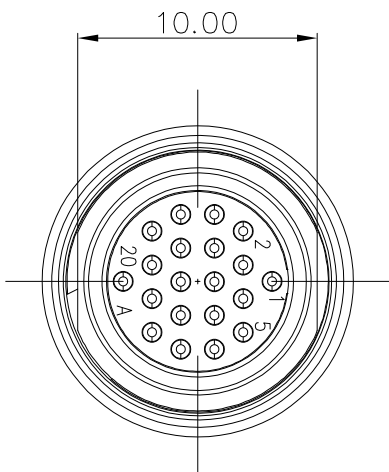

Current rating: 1A
Rated voltage: 30V
Contact resistance: 30mΩ Max.
Durability: 1000 cycles
Temperature range: -25°C to +85°C
ROHS compliant

9	Rear Nut	Copper	Plating: Ni	1pcs
8	Crimp ring	POM	Color: white	1pcs
7	Snap ring	Copper	Plating: Ni	1pcs
6	Terminal	Copper	Plating: Au	10pcs
5	Terminal	Copper	Plating: Au	10pcs
4	Outside shell	Copper	Plating: Ni	1pcs
3	Housing	PPS	Color: black	1pcs
2	Elastic Shell	Copper	Plating: Ni	1pcs
1	Shell	Copper	Plating: Ni	1pcs
Item	Desc.	Material	Remark	Qty

				QUALITY SYMBOLS	Tolerance		NAME: HR25A-9P-20P male solder molded type				PART NO.		B10-A0920TPH-01		
△	2026/05/13	Change the product name	Carl Hu	□: ☒:	.x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
△	2024/10/29	First edition release	Carl Hu	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2024/10/29	Yugong	Carl Hu				
				▽: ▽:	.xx ±0.25	lineconn 东莞市林诚塑胶电子有限公司								http://www.lineconn.com	
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C			TEL:0769-85181660 85181770								

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770