
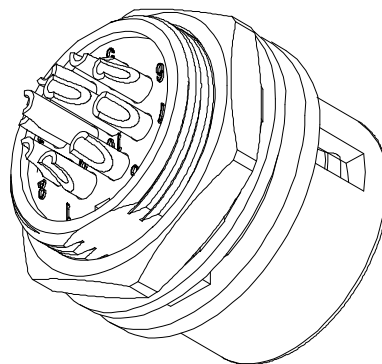
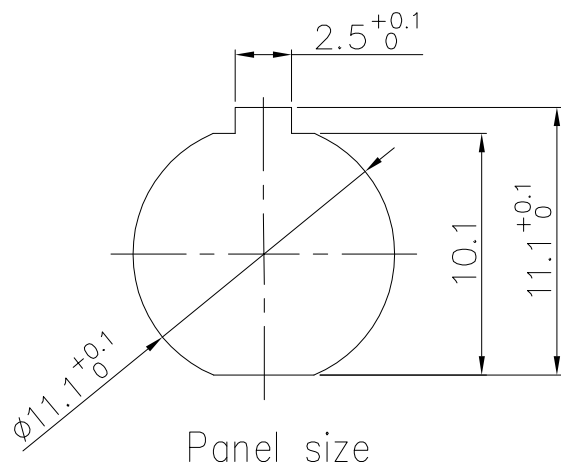
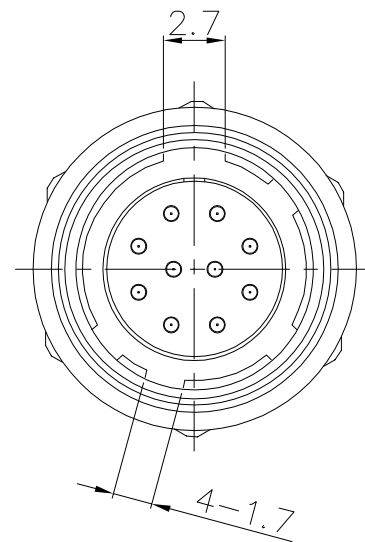
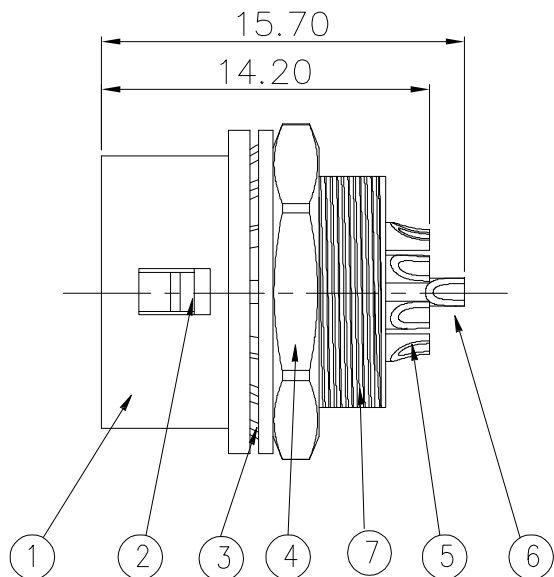


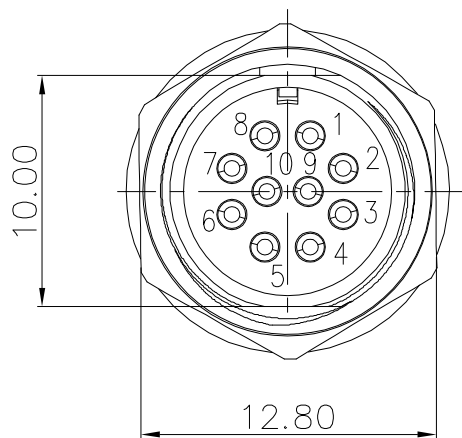

Current rating: 2A
Rated voltage: 100V
Contact resistance: 10mΩ Max.
Durability: 1000 cycles
Temperature range: -25℃ to +85℃
ROHS compliant

7	Housing	PPS	Color: black
6	Terminal	Copper	Plating: Au
5	Terminal	Copper	Plating: Au
4	Nut	Copper	Plating: Ni
3	Gaskets	Stainless steel	Plating: Ni
2	Spring	QBe1.9	
1	Shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS		Tolerance		NAME: HR10A-10R-10P male solder rear lock panel		PART NO. B10-02PZ10SH-ZGD	
				□: CRITICAL	☒: MAJOR	x. ±0.60		REV: A	UNIT: mm	DRW BY	CHK BY
				▽: ZERO DEFECT	▽: S.P.C	.x ±0.40		SCALE: N:1	DATE: 2023/05/24	Yugong	APP BY
						.xx ±0.25				Carl Hu	DRAWING NO. B10-168
A	△	2023/05/24	First edition release	Carl Hu							
SIDE	DATE	DESCRIPTION		APPROVER							
8	7	6	5	4	3	2	1				

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770