

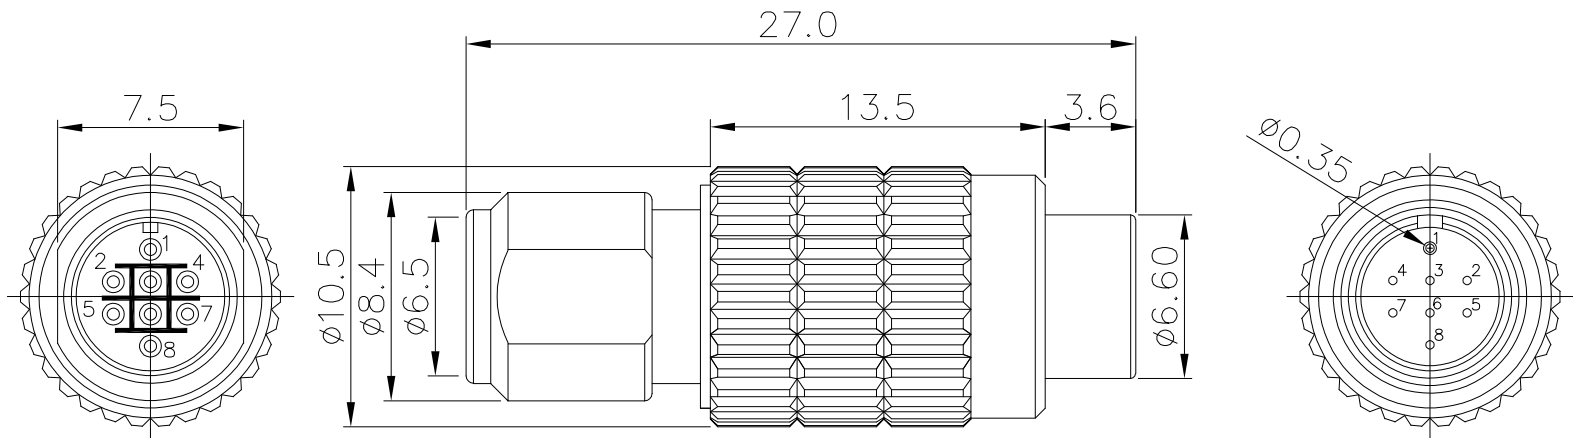


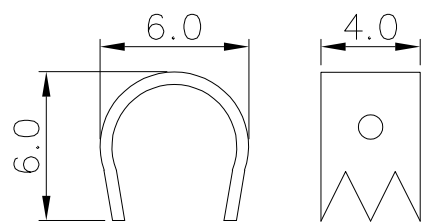

Solder Side

Mating Side

Current rating: 4A
Rated voltage: 250V
Contact resistance: 10mΩ Max.
Durability: 500 cycles
Temperature range: -45°C to +105°C
ROHS compliant
Waterproof rating: IP67

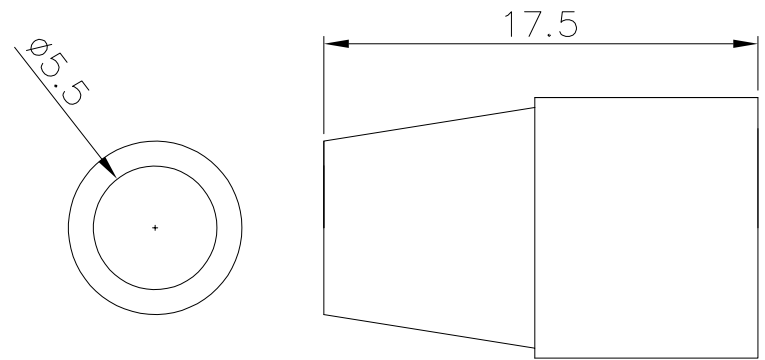

8	Jacket	Rubber	Color: black
7	Hood	Copper	Plating: Ni
6	Seal Ring	EPDM	Color: black
5	Cable sleeve	Copper	Plating: Ni
4	Housing	PPS	Color: black
3	Shield Shell	Copper	Plating: Ni
2	Terminals	Copper	Plating: Au
1	Shell	Copper	Plating: Ni
Item	Desc.	Material	Remark

△	2024/11/29	Change tolerance	Carl Hu
△	2020/03/15	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		HR25-7TP-8P(72) male solder assembly, plastic jacket				PART NO.		B10-R257TP8P-72	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
SCALE:	N:1	DATE:	2020/03/15	Huangmei	Carl Hu		B10-102		
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770				