
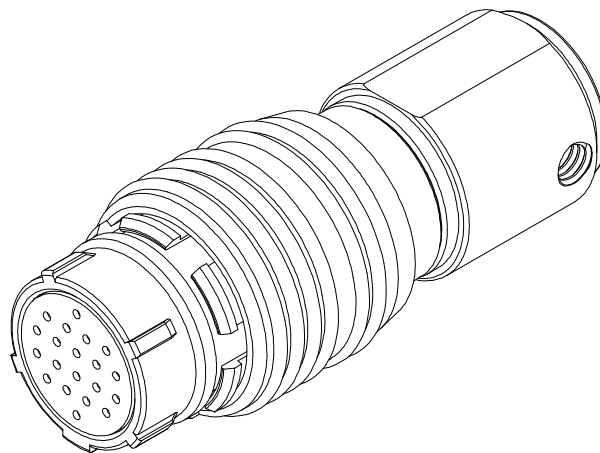
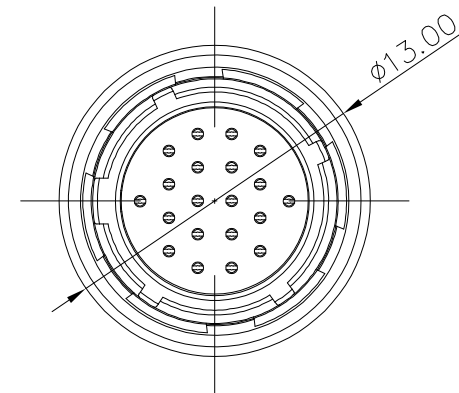
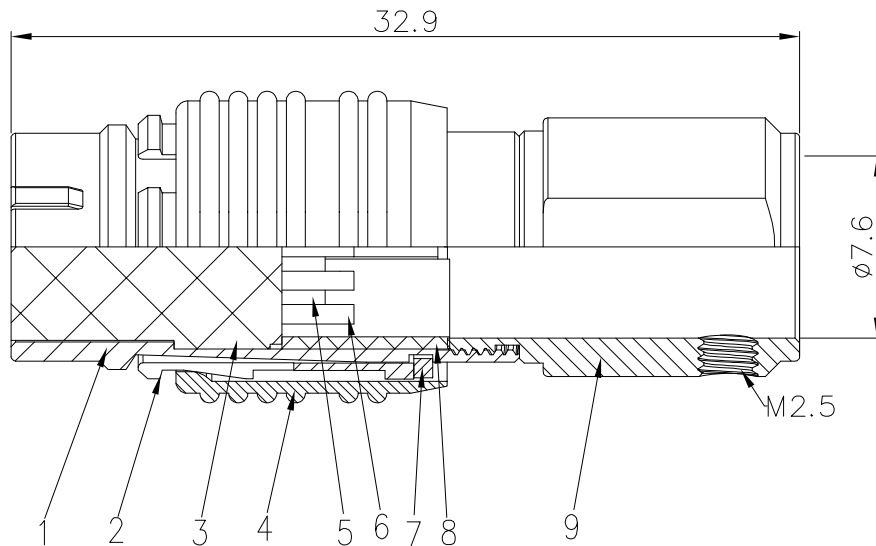


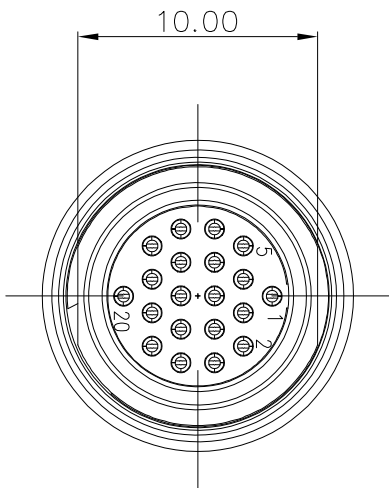

Current rating: 1A
Rated voltage: 30V
Contact resistance: 30mΩ Max.
Durability: 1000 cycles
Temperature range: -25°C to +85°C
ROHS compliant

9	Rear Nut	Copper	Plating: Ni	1pcs
8	Crimp ring	POM	Color: white	1pcs
7	Snap ring	Copper	Plating: Ni	1pcs
6	Terminal	Copper	Plating: Au	10pcs
5	Terminal	Copper	Plating: Au	10pcs
4	Outside shell	Copper	Plating: Ni	1pcs
3	Housing	PPS	Color: black	1pcs
2	Elastic Shell	Copper	Plating: Ni	1pcs
1	Shell	Copper	Plating: Ni	1pcs
Item	Desc.	Material	Remark	Qty

					QUALITY SYMBOLS	Tolerance	NAME:	HR25A-9P-20S female solder molded type				PART NO.	B10-A0920TSH-01			
	2026/05/13	Change the product name			Carl Hu	☐ : ☒ :	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B10-227	
	2024/10/29	First edition release			Carl Hu	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2024/10/29	Yugong	Carl Hu			
						.xx ±0.25										
					: :		lineconn 东莞市林诚塑胶电子有限公司								http://www.lineconn.com	
SIDE	DATE	DESCRIPTION			APPROVER	ZERO DEFECT S.P.C						TEL:0769-85181660 85181770				
8		7		6		5		4		3		2		1		