


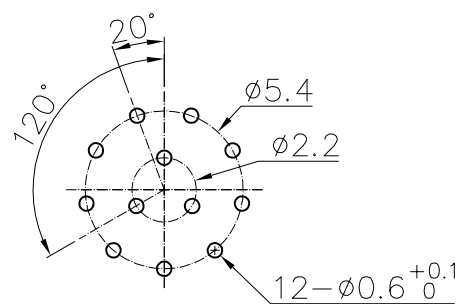
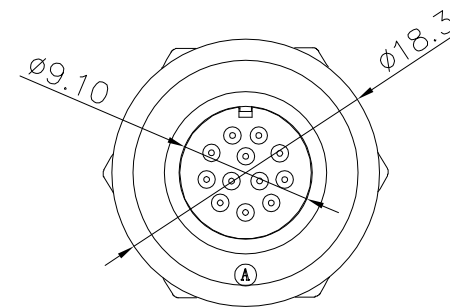
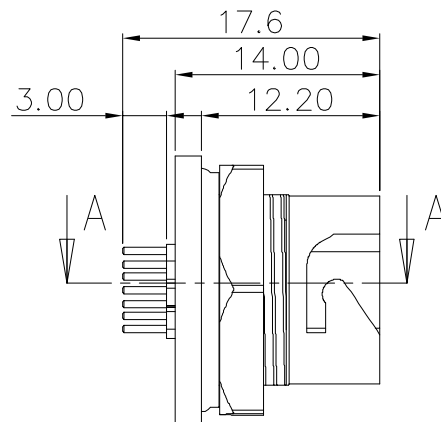


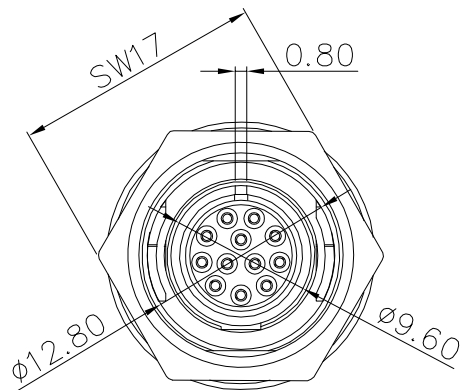

PCB board size



Panel size

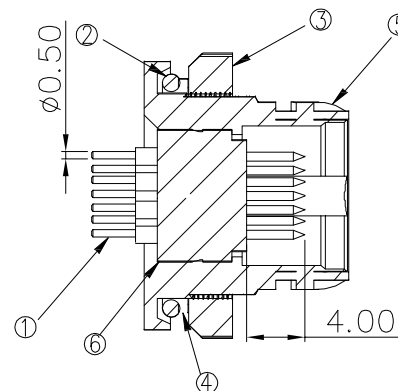

Section A-A

Current rating: 2 AMP.
Operating voltage: 30V
Contact resistance: 15m Ω /Max.
Durability: 1000 cycles
Temperature range: -25℃ to +85℃
ROHS compliant

6	Housing	PPS	Color: black
5	Hood	Zinc alloy	Plating: Ni
4	Washer	Stainless Steel	
3	Nut	Copper	Plating: Ni
2	Sealing ring	Silicone	
1	Terminal	Copper	Plating: Au
Item	Desc.	Material	Remark

					QUALITY SYMBOLS	Tolerance	NAME: LF10WBRB-12PD male vertical for PCB,front lock panel	PART NO.	B10-LF10WBRB-12PD			
					☐ : ☒ :	x. ±0.60	REV: A	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO.
					CRITICAL MAJOR	.x ±0.40	SCALE: N:1	DATE: 2023/06/12	Huangmei	Jack Chen		B10-169
					☒ : ☒ :	.xx ±0.25	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770					
					ZERO DEFECT S.P.C							
A		2023/06/12	First edition release		Jack Chen							A
	SIDE	DATE	DESCRIPTION		APPROVER							
	8	7	6	5	4	3	2	1				