


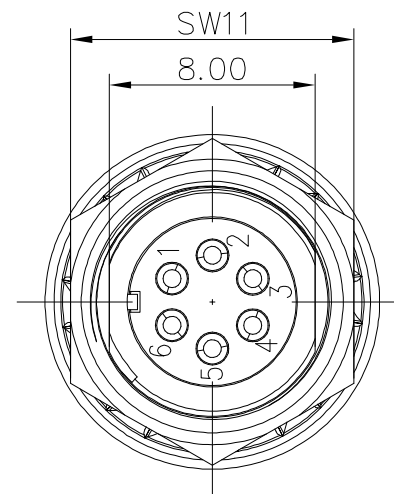


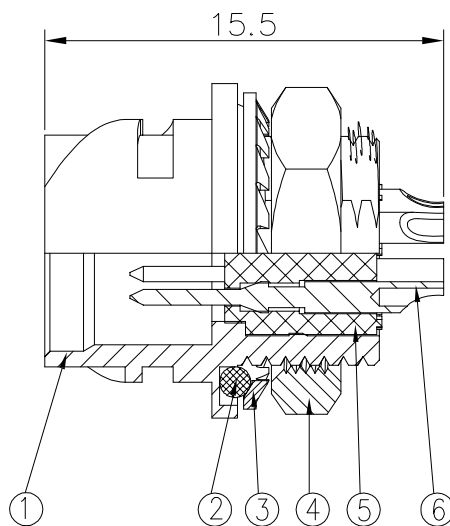

Soldering face

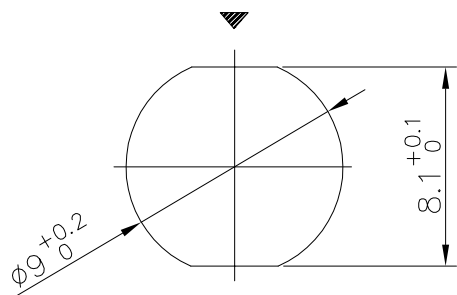

Panel size

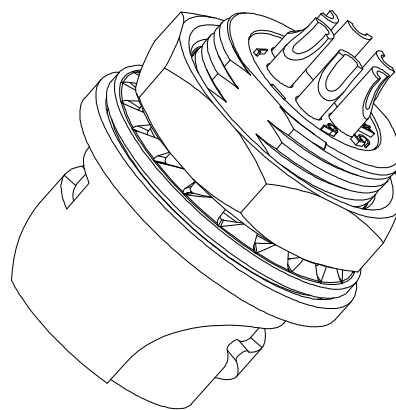

Current rating: 2A
Operating voltage: 30V
Contact resistance: 15mΩ/Max.
Durability: 1000 cycles
Temperature range: -25°C to +85°C
ROHS compliant

6	Terminal	Copper	Plating: Au
5	Housing	PPS	Color: black
4	Nut	Copper	Plating: Ni
3	Washer	Stainless Steel	
2	Sealing ring	Silicone	
1	Shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME:	LFO7WBR-6P male solder rear lock panel				PART NO.	B10-0LF07WBR-6P	
				□ : ☒ :	x. ±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2023/07/19	Huangmei	Carl Hu		B10-176
				▽ : ▽ :	.xx ±0.25	 东莞市林诚塑胶电子有限公司 http://www.lineconn.com					http://www.lineconn.com TEL:0769-85181660 85181770		
				ZERO DEFECT S.P.C	 								
SIDE	DATE	DESCRIPTION		APPROVER									
8	7	6	5	4	3	2		1					