
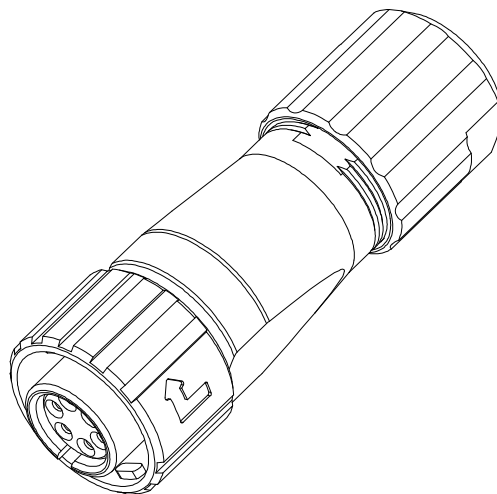
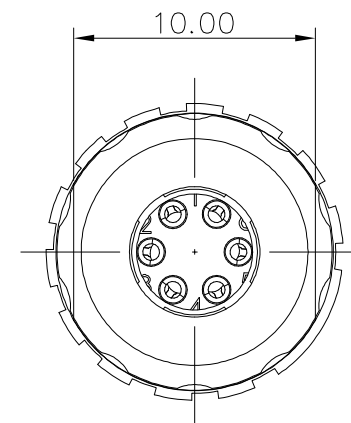
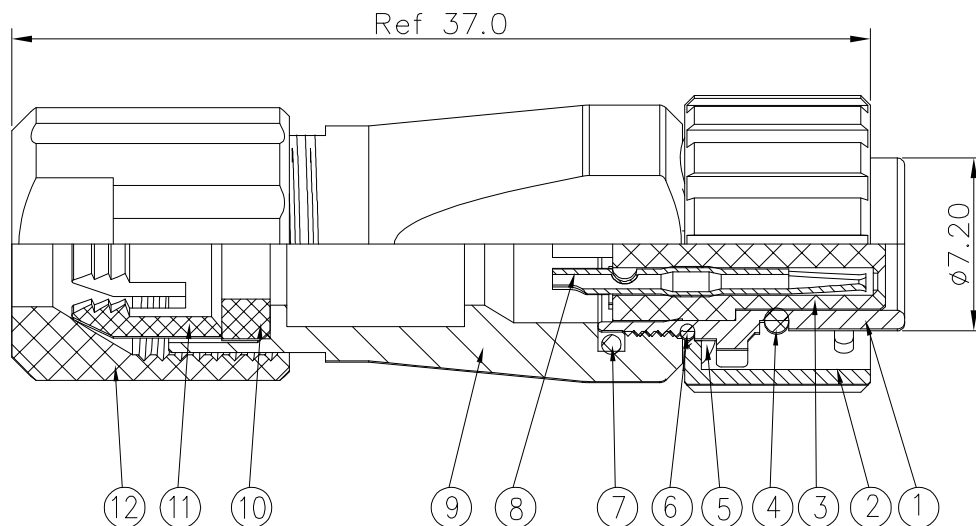


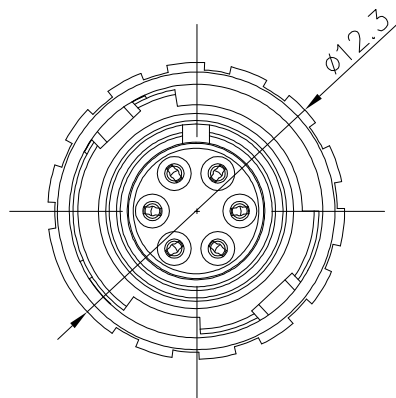

12	Nut	PA66	Color: brown
11	Cable clip	POM	Color: black
10	Gasket	Rubber	Color: black
9	Cable Sleeve	Zinc alloy	Plating: Ni
8	Terminal	Copper alloy	Plating: Au
7	Seal Ring	Rubber	Color: black
6	Spring	Stainless spring steel	
5	Wave spring	Copper alloy	Passivation
4	Seal Ring	Rubber	Color: black
3	Housing	PPS	Color: black
2	Connection sleeve	Zinc alloy	Plating: Ni
1	Shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

Current rating: 2A
Operating voltage: 30V
Contact resistance: 15mΩ Max.
Durability: 1000 cycles
Temperature range: -25℃ to +85℃
ROHS compliant

△	2024/08/03	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25
 	

NAME:	LF07WBP-6S female solder zinc alloy hood assembly			PART NO.	B10-0LF07WBP-6S		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2024/08/03	Yugong	Carl Hu		B10-194
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			
3		2		1			