



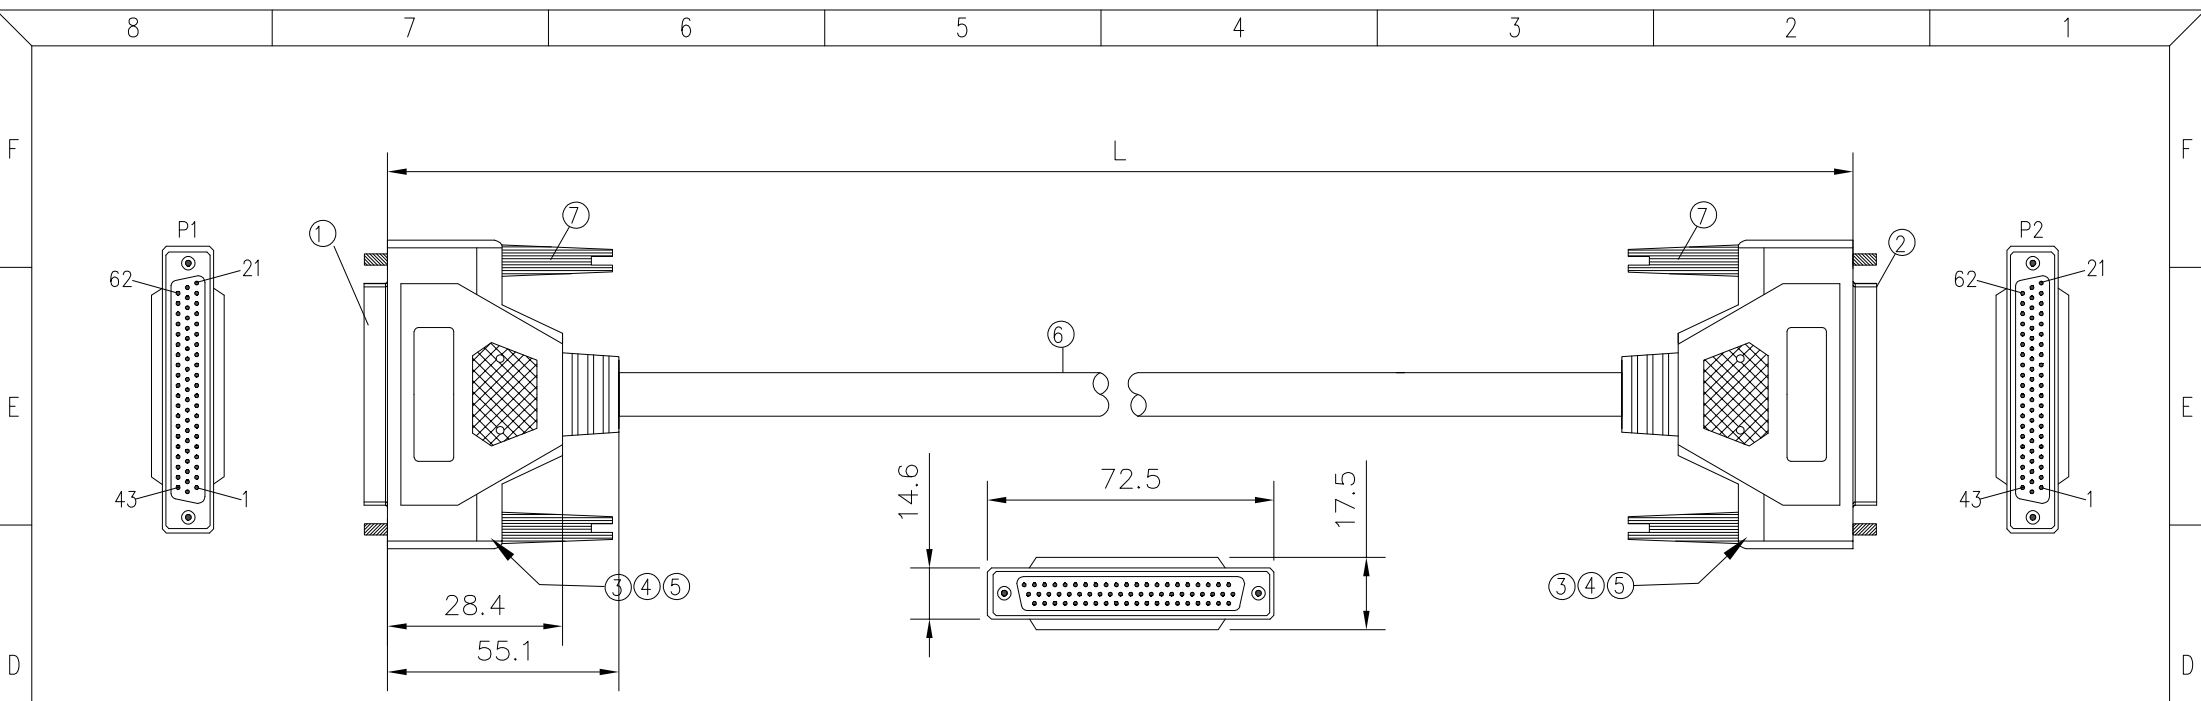

Pin assignment

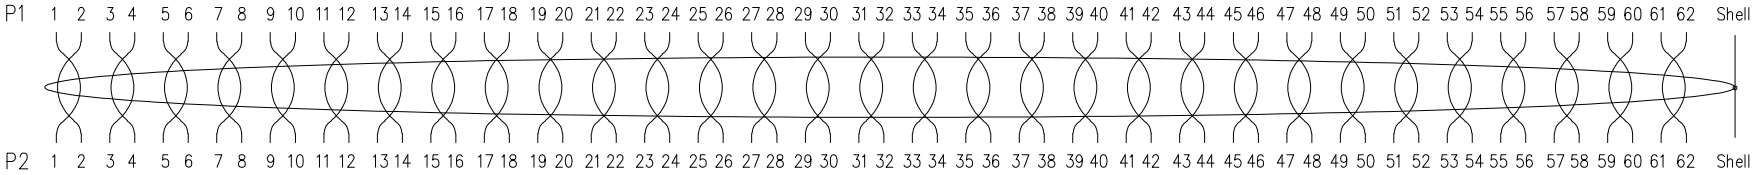

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5Ω max.
3.Insulator resistance: 5MΩ min, DC 300V 0.01sec.
4.ROHS compliant
5.Part number description: A04-06221XXX-A1,
XXX: 001=length: 10cm

7	Screw	Screw 4-40# Ni(big E33 black)	4pcs
6	Cable	UL20276 28AWG*31P+AEB,PVC jacket,color black, OD 10.0mm	1pcs
5	Copper foil	Copper foil W=25mm	NA
4	Over mold	45P PVC color: black	NA
3	Inside mold	PE	NA
2	Connector	HD.D-SUB 62pin female solder,housing color black	1pcs
1	Connector	HD.D-SUB 62pin female solder,housing color black	1pcs
Item	Part name	Description	Qty

A					QUALITY SYMBOLS □ : ☒ : CRITICAL MAJOR ▽ : ▽ : ZERO DEFECT S.P.C	Tolerance		NAME:	HD.D-SUB 62pin female to female cable			PART NO.		A04-06221XXX-A1	
						Length(mm)	Tolerance(mm)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. A04-033
		2025/01/12	First edition release	Carl Hu		300~2000	±50	SCALE:	NONE	DATE:	2025/01/12	Yugong	Carl Hu		
						2001~5000	±100								
							5001~	±150							
	SIDE	DATE	DESCRIPTION		APPROVER			lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
8		7		6		5		4		3		2		1	