

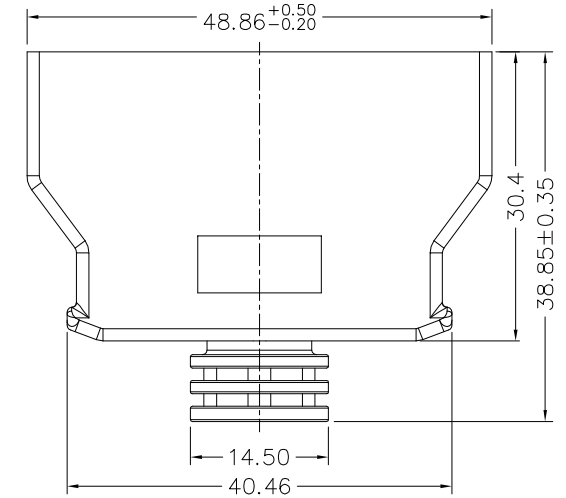


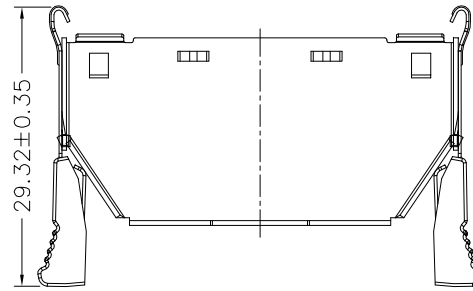
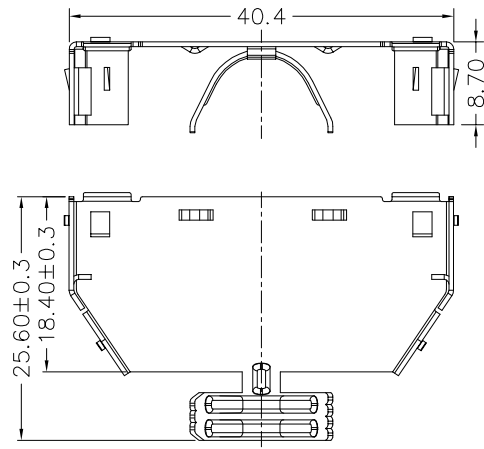
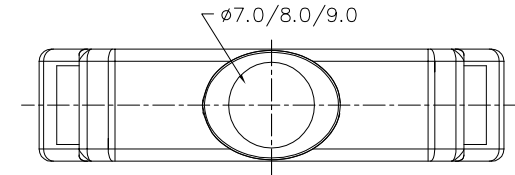




Current rating:1A
Withstanding voltage: 500V AC
Contact resistance : 35mΩ max.
Insulation resistance: 500MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant
Part No.:

B03-0503X1X2-X1
Housing color:
1: Black
C: Beige
Terminal plating:
A: G/F
E: Au 5u"
H: Au 15u"
Hood OD:
7: 7.0mm
8: 8.0mm
9: 9.0mm

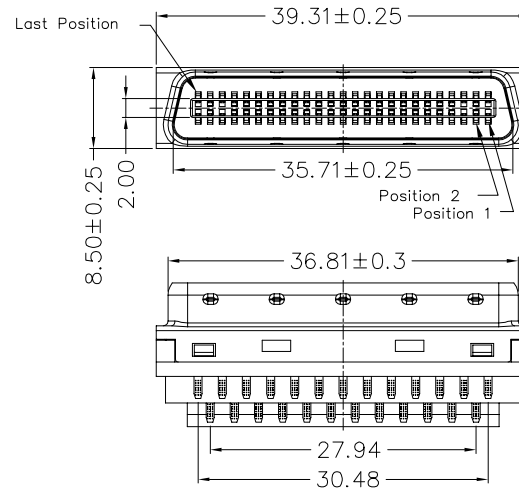


6	Spring latch	SUS	
5	Outside sheel	SPCC	Plating: Ni
4	Hood&wrench	ABS+G.F.30% (UL 94V-0)	Color: see part on.
3	Housing&cover	PBT+G.F.30% (UL 94V-0)	Color: black
2	Sheel	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: see part on Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remaks






△			
△	2013/10/26	Add hood OD	King Zhou
△	2009/04/02	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
□ : ☒ :
CRITICAL MAJOR
▽ : ▽ :
ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25



NAME:		SCSI 50pin male solder assembly plastic hood,fish hooks type			PART NO.	B03-0503X1X2-X1		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2009/04/02	Dawn Hu	King Zhou		B03-028	
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			

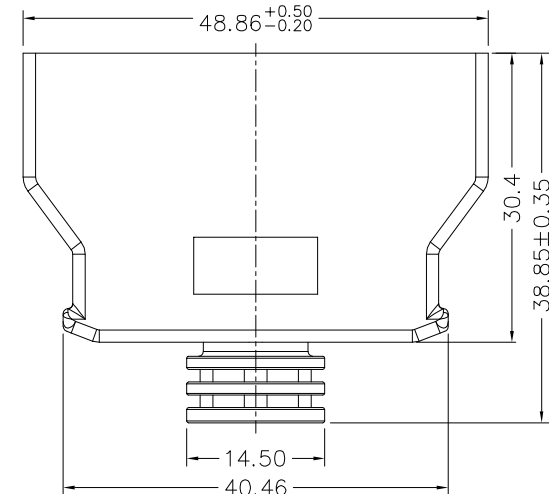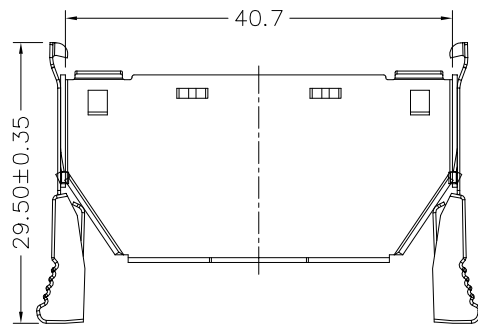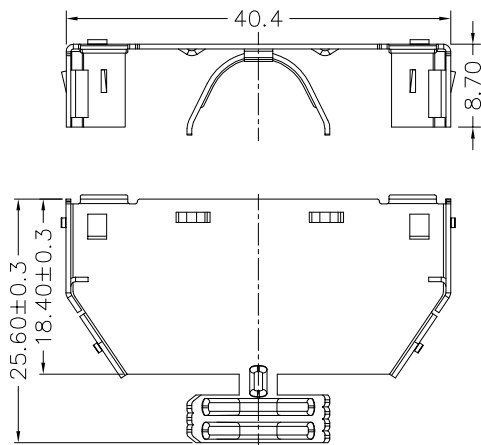

Current rating:1A
Withstanding voltage:500V AC
Contact resistance : 35mΩ max.
Insulation resistance:500MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant
Part No.:

B03-0503X1X1-X1

Housing color:

1:Black

C:Beige

Terminal plating:

A: G/F

C: Au 3u"





H: Au 15u"

Hood OD:

7: 7.0mm

8: 8.0mm

9: 9.0mm

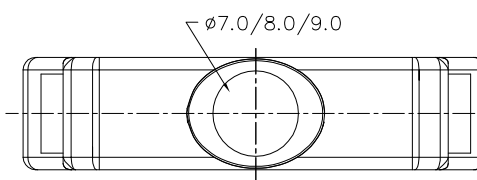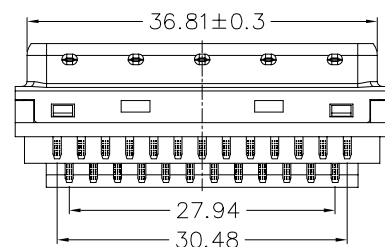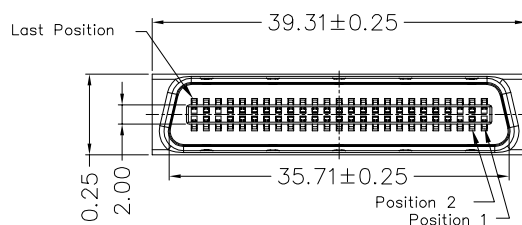

6	Spring latch	SUS	
5	Outside sheel	SPCC	Plating:Ni
4	Hood&wrench	ABS+G.F.30% (UL 94V-0)	Color:see part on.
3	Housing&cover	PBT+G.F.30% (UL 94V-0)	Color:black
2	Sheel	SPCC	Plating:Ni
1	Terminal	Copper alloy	Contact area:see part on Solder area:Sn Under-plating: Ni
Item	Desc.	Material	Remaks

△	2016/08/27	Increased plating specifications for terminals	Jack Chen
△	2013/10/26	Add hood OD	King Zhou
△	2009/04/02	First edition release	King Zhou


SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME: SCSL 50pin male solder assembly plastic hood,flag hooks type

REV: C UNIT: mm DRW BY: CHK BY: APP BY: DRAWING NO. B03-121

SCALE: N:1 DATE: 2009/04/02 Huangmei Jack Chen

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770