


RoHS

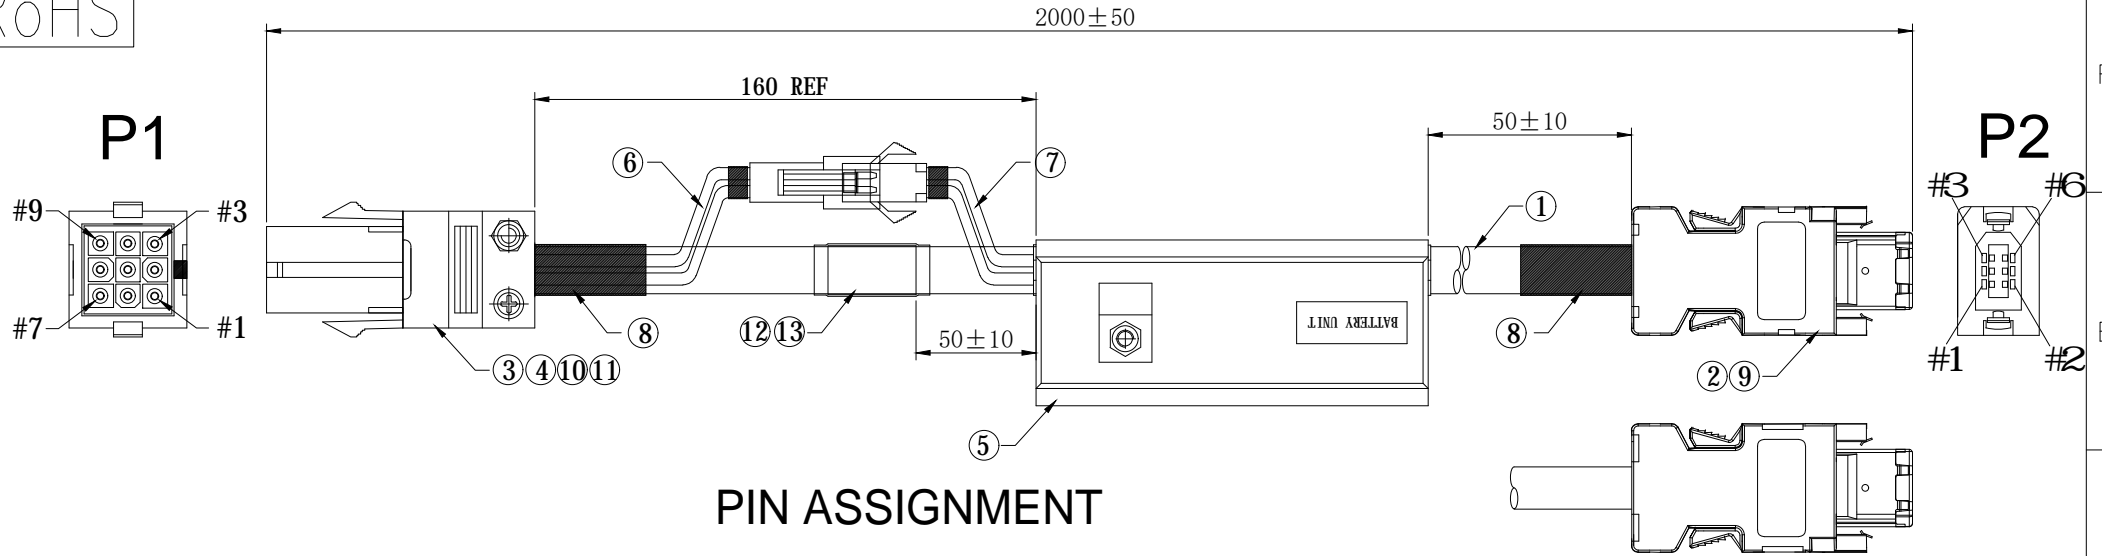

PIN ASSIGNMENT

P1	WIRE COLOR	P2	BATTERY UNIT
4	BLACK	5	"+"RED
5	BLACK/WHITE	6	"-"BLACK
1	RED		
2	RED/WHITE		
7	BLUE		
8	BLUE/BLACK	1	
8	BRAID	2	
3		SHELL	

PART NO.:

COLOR: A02-0096X XXX-01

1: BLACK

3: GREEN

LENGTH:

010:1m

100:10m

NOTES:

- ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
- CONDUCTOR RESISTANCE: 5 OHMS MAX.
- INSULATOR RESISTANCE: 3M OHMS MIN, DC 300V 0.01sec.
- THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

ITEM	PART NAME	DESCRIPTION	QY'T
13	LABEL	LABEL 15*30mm,WHITE/BLACK.	1PCS
12	TUBE	TRANSPARENT TUBEØ8.0*40MM	3PCS
11	TUBE	BLACK TUBEØ1.5*22MM COLOR:BLACK	1PCS
10	TUBE	BLACK TUBEØ1.5*12MM COLOR:BLACK	3PCS
9	TUBE	BLACK TUBEØ1.5*8MM COLOR:BLACK	12PCS
8	TUBE	BLACK TUBEØ8.0*60MM COLOR:BLACK	2PCS
7	CABLE3	SM2.54 2P FEMALE WIRE HARNESS, COLOR:BLACK	1PCS
6	CABLE2	SM2.54 2P MALE WIRE HARNESS COLOR:BLACK	1PCS
5	BATTERY	BATTERY UNIT, COLOR: BLACK	1SET
4	TERMINAL	FL镀锡端子 (AMP P/N: 170365-1)	
3	HSG	HSG 9P FEMALE白色三排,带黑色锁线夹 (AMP P/N:172161-1)	1SET
2	CONN	SM 6P MALE	1SET
1	CABLE1	0.2mm²*3P+ABD CABLE , JACKET:PVC, OD= 6.5mm	NA

QUALITY SYMBOLS				Tolerance		NAME: 松下小功率绝对值编码器线 (客户用图)			PART NO. A02-0096X XXX-01				
△	□	▽	○	尺寸(MM)	公差(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	□	▽	○	300~2000	±50	SCALE:	NONE	DATE:	2019/03/05	Jing Li	Jack Chen		A02-006
SIDE	DATE	DESCRIPTION	APPROVER	5001~	±150	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
8	7	6	5	4	3	2	1						