



RoHS

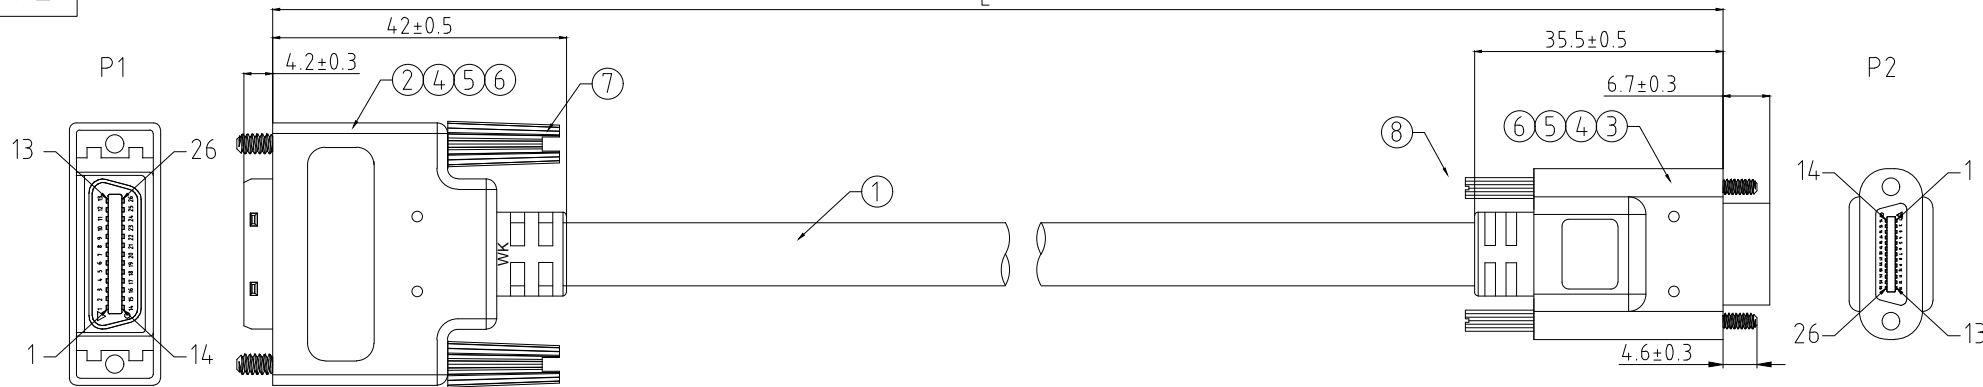

Wire Assignment:

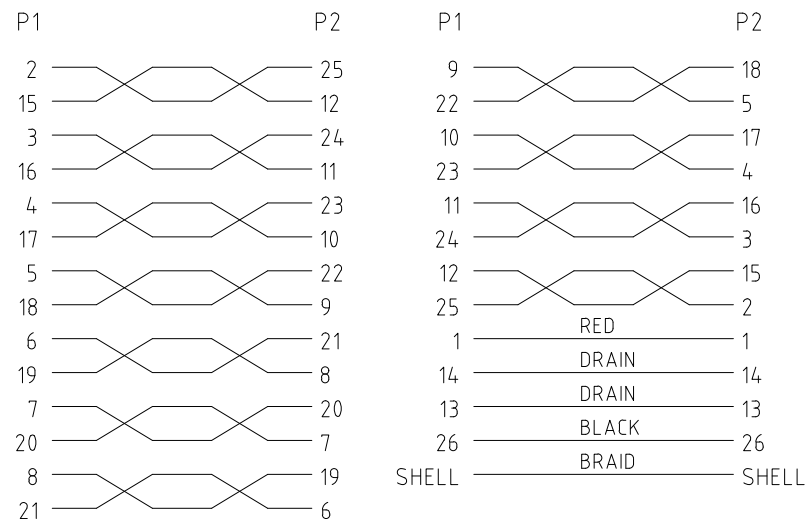

ITEM	MATERIAL	DESCRIPTION	Q'TY	UNIT
①	CABLE	UL 20276 (28AWG+AL)x11P+24AWGx2C+Dx2C+AB OD:9.0MM Jacket:Beige PVC	See TABLE A	mm
②	CONN	MDR 26P Male Insulatin:Black Shell:NI	1	PCS
③	CONN	SDR 26P Male Insulatin:Black Shell:NI	1	PCS
④	Inner Mold	LD-PE	N/A	KG
⑤	Over Mold	BLACK PVC	N/A	KG
⑥	Copper Foil	Copper Foil	N/A	MM
⑦	Screw	#4-40 Thumbscrew L=44MM	2	PCS
⑧	Screw	M2.0 Thumbscrew L=40.5MM	2	PCS

REMARK:

- <1>.THE PRODUCT IS "RoHS COMPLIANT".
- <2>.THE MARK "□" IS QC CHECK DIMENSIONS.

NOTES:

- 1. OPEN/SHORT/INTERMITTENCE:100% TEST
- 2. DIELECTRIC WITHSTAND:AC100V/1MIN.
- 3. INSULATION RESISTANCE:DC 100V/10MΩ (MIN)
- 4. CONDUCTIVE RESISTANCE:See TABLE A

△				QUALITY SYMBOLS
△				□: ☒:
△	2018/09/11	新版发行	Jing Li	CRITICAL MAJOR
SIDE	DATE	DESCRIPTION	APPROVER	▽: ▽: ZERO DEFECT S.P.C

Tolerance	
尺寸(MM)	公差(MM)
300~2000	±50
2001~5000	±100
5001~	±150

NAME:	工业相机Camera Link连接线 (客户用图)				PART NO.	A10-02612XXX-01	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	NONE	DATE:	2018/09/11	Jing Li	Jack Chen		A10-004
东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			