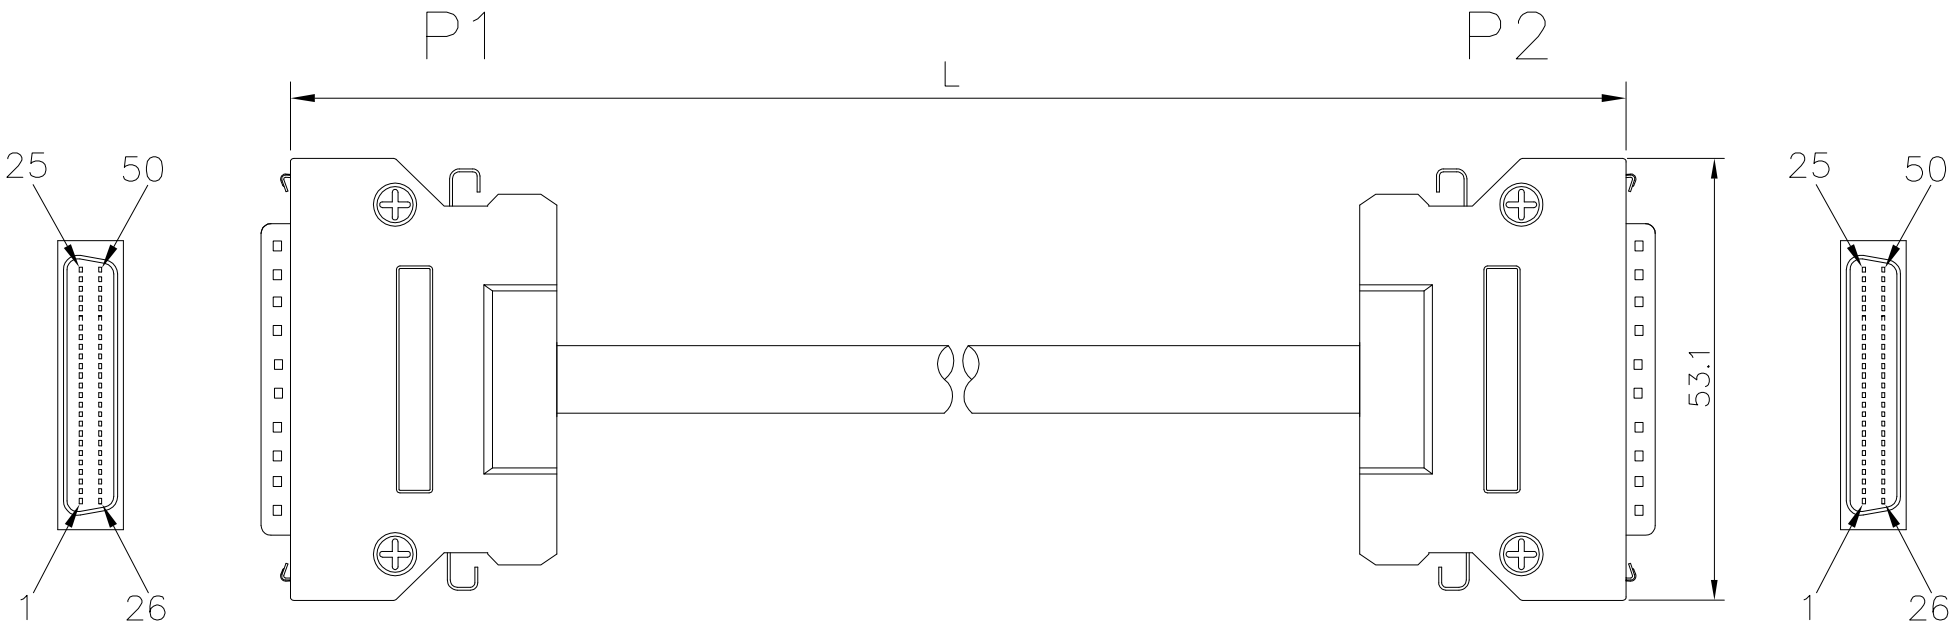

Pin assignment

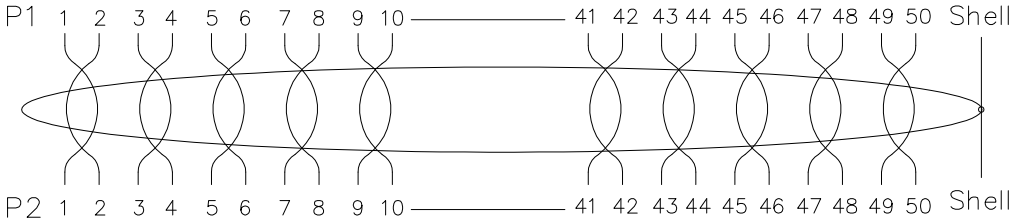

Part number:
A09-05011XXX-X6
Length:
010: 1m
015: 1.5m
Connector type:
S: solder type
C: IDC type

Notes:
1.Electrical test: 100% open,short&miss wire test.
2.Conductor resistance: 5 ohms max.
3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
4.ROHS compliant

Item	Part name	Description	QY'T
2	Cable	UL20276 25P*28awg+ABD PVC jacket,color: black, OD 8.5mm	1pcs
1	Connector	SCSI II(HPDB) 50pin male,zinc alloy hood with latch	2set

SIDE	DATE	DESCRIPTION	APPROVER
4	2021/07/04	Change part number	Carl Hu
3	2018/12/24	Add wiring definition	Jack Chen
1	2015/05/13	First edition release	Jack Chen

QUALITY SYMBOLS
□: CRITICAL
⊠: MAJOR
▽: ZERO DEFECT
▽: S.P.C

Tolerance

Length(mm)	Tolerance(mm)
300~2000	±50
2001~5000	±100
5001~	±150

NAME:	HPDB 50pin male-male cable, zinc alloy hood with latch				PART NO.	A09-05011XXX-X6	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	NONE	DATE:	2015/05/13	Yugong	Carl Hu		A09-007

lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769-85181660 85181770