



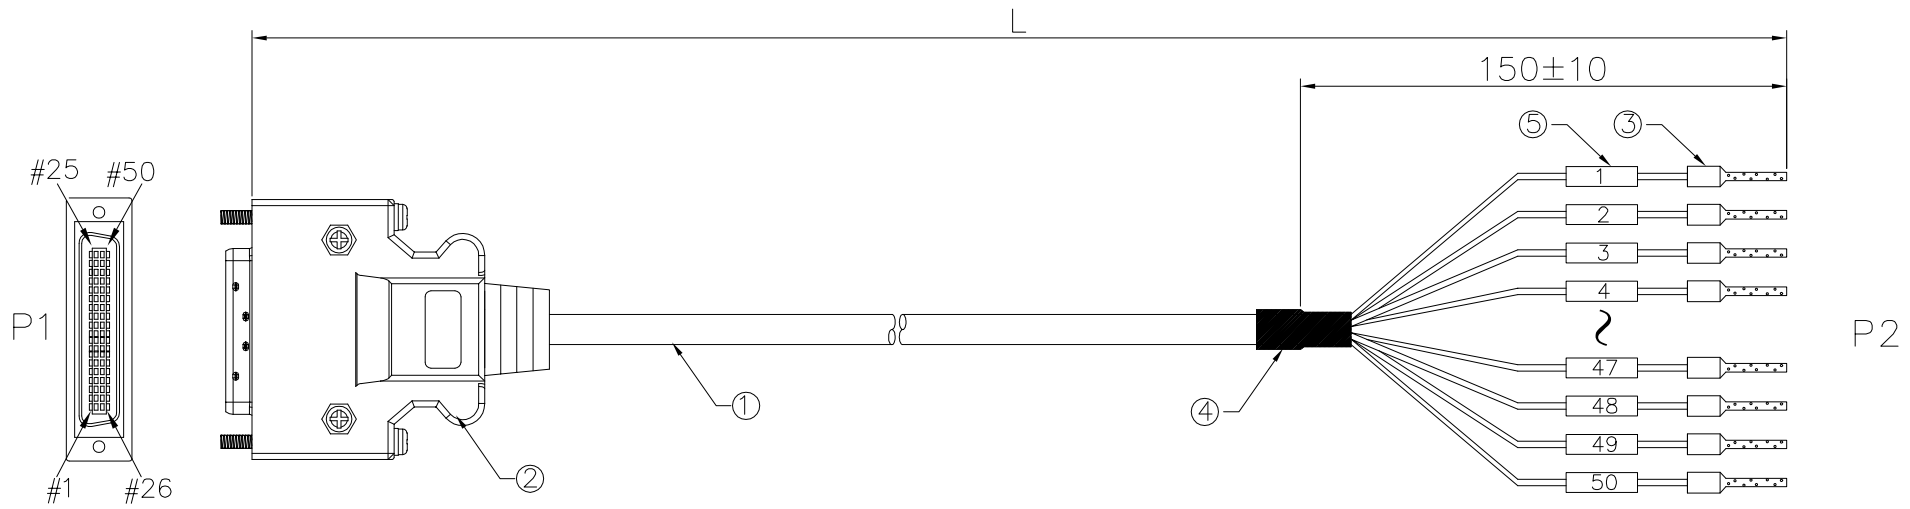

Pin assignment

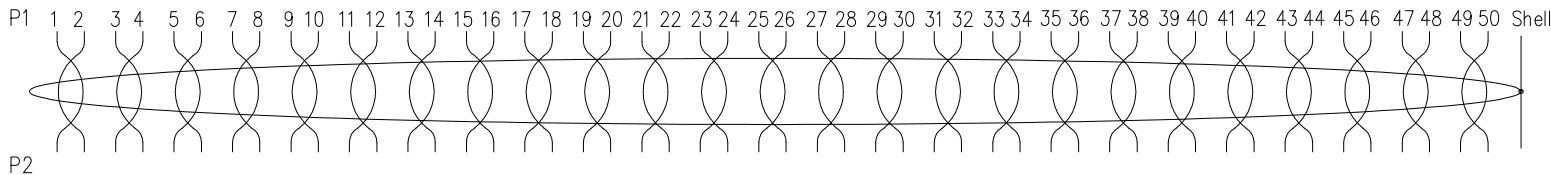

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5 ohms max.
3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
4.ROHS compliant
5.Part number description: A03-05051XXX-01,
XXX: 001=length:10cm

5	Tube	PVC code tube,white	50pcs
4	Tube	Black shrink tube Ø8.0*35mm	1pcs
3	Terminal	Tube crimp terminals Ø2.0mm Ni plating color:red	50pcs
2	Connector	SM 50pin male solder plastic hood screw type,33mm screws	1set
1	Cable	UL20276 25P*28AWG+AB,jacket:PVC color:black,OD 8.5mm	NA
Item	Part name	Description	Q'ty

					QUALITY SYMBOLS	Tolerance		NAME: SM 50pin male to Tube crimp terminal,with numeral tube		PART NO.		A03-05051XXX-01			
					□: ☒:	Length(mm)	Tolerance(mm)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
A	△	2019/07/18	First edition release	Dean Fan	CRITICAL	MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2019/07/18	Huangmei	Jack Chen	A03-034
							2001~5000	±100							
							5001~	±150							
SIDE	DATE	DESCRIPTION		APPROVER	ZERO DEFECT	S.P.C					lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770				
8		7		6	5	4	3		2		1				