

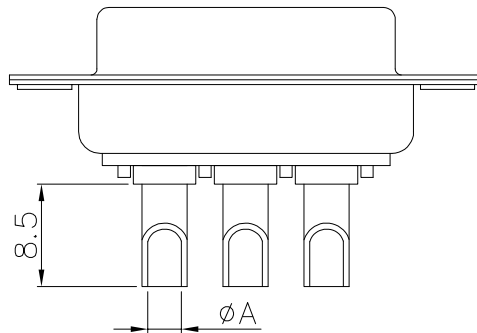



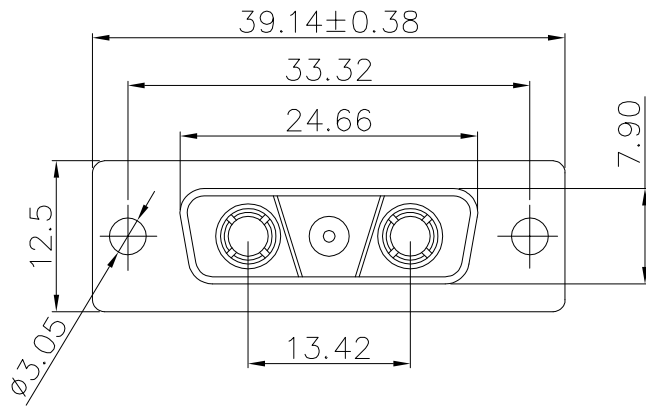

10A,20A,30A

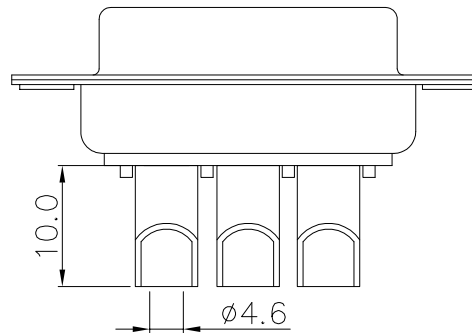

40A

Current rating:10/20/30/40 AMP.
Contact resistance:2.7 milliohms max.
Withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range:−55℃ to +125℃
ROHS compliant
Part number:

B09-3V34X1X0-X1

Housing color:_____

1: Black

3: Green

5: White

Terminal plated: _____

4: Au 2u"

5: Au 1u"

Current rating: _____

A: 10A,Dim.A ϕ 1.7

B: 20A,Dim.A ϕ 2.8

C: 30A,Dim.A ϕ 3.2

D: 40A,Dim.A ϕ 4.6




4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

△	2021/05/07	Change part number	Carl Hu
△	2016/10/11	Add terminal electroplating specifications	Jack Chen
△	2012/09/26	First edition release	Jing Li


QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25
 	

NAME:		3V3 female solder,cup 8.5mm			PART NO.		B09-3V34X1X0-X1	
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2012/09/26	Yugong	Carl Hu		B09-004	
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			

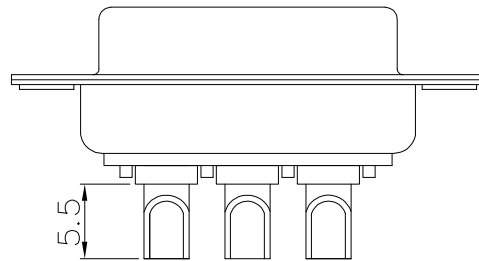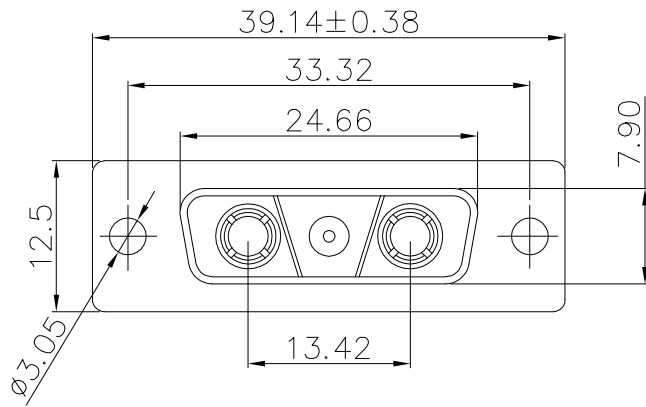

10A,20A,30A

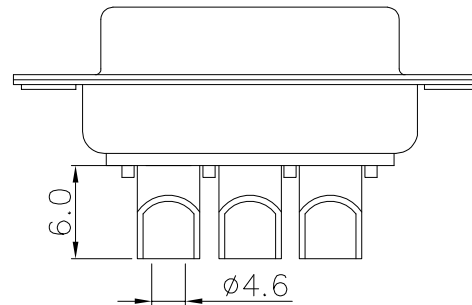

40A

Current rating:10/20/30/40 AMP.
Contact resistance:2.7 milliohms max.
Withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range:−55℃ to +125℃
ROHS compliant
Part number:

B09-3V34X1X0-X2

Housing color:_____

1: Black

3: Green

5: White

Terminal plated: _____

4: Au 2u"

5: Au 1u"

Current rating: _____

A: 10A,Dim.A ϕ 1.7

B: 20A,Dim.A ϕ 2.8

C: 30A,Dim.A ϕ 3.2

D: 40A,Dim.A ϕ 4.6

4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

△	2022/03/17	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS

□: ☒:

CRITICAL MAJOR

▽: ▽:


ZERO DEFECT S.P.C

Tolerance

x. ±0.60

.x ±0.40

.xx ±0.25



NAME:

3V3 female solder,cup 5.5mm

PART NO.

B09-3V34X1X0-X2

REV:

A

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2012/09/26

Yugong

Carl Hu

B09-017

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770