


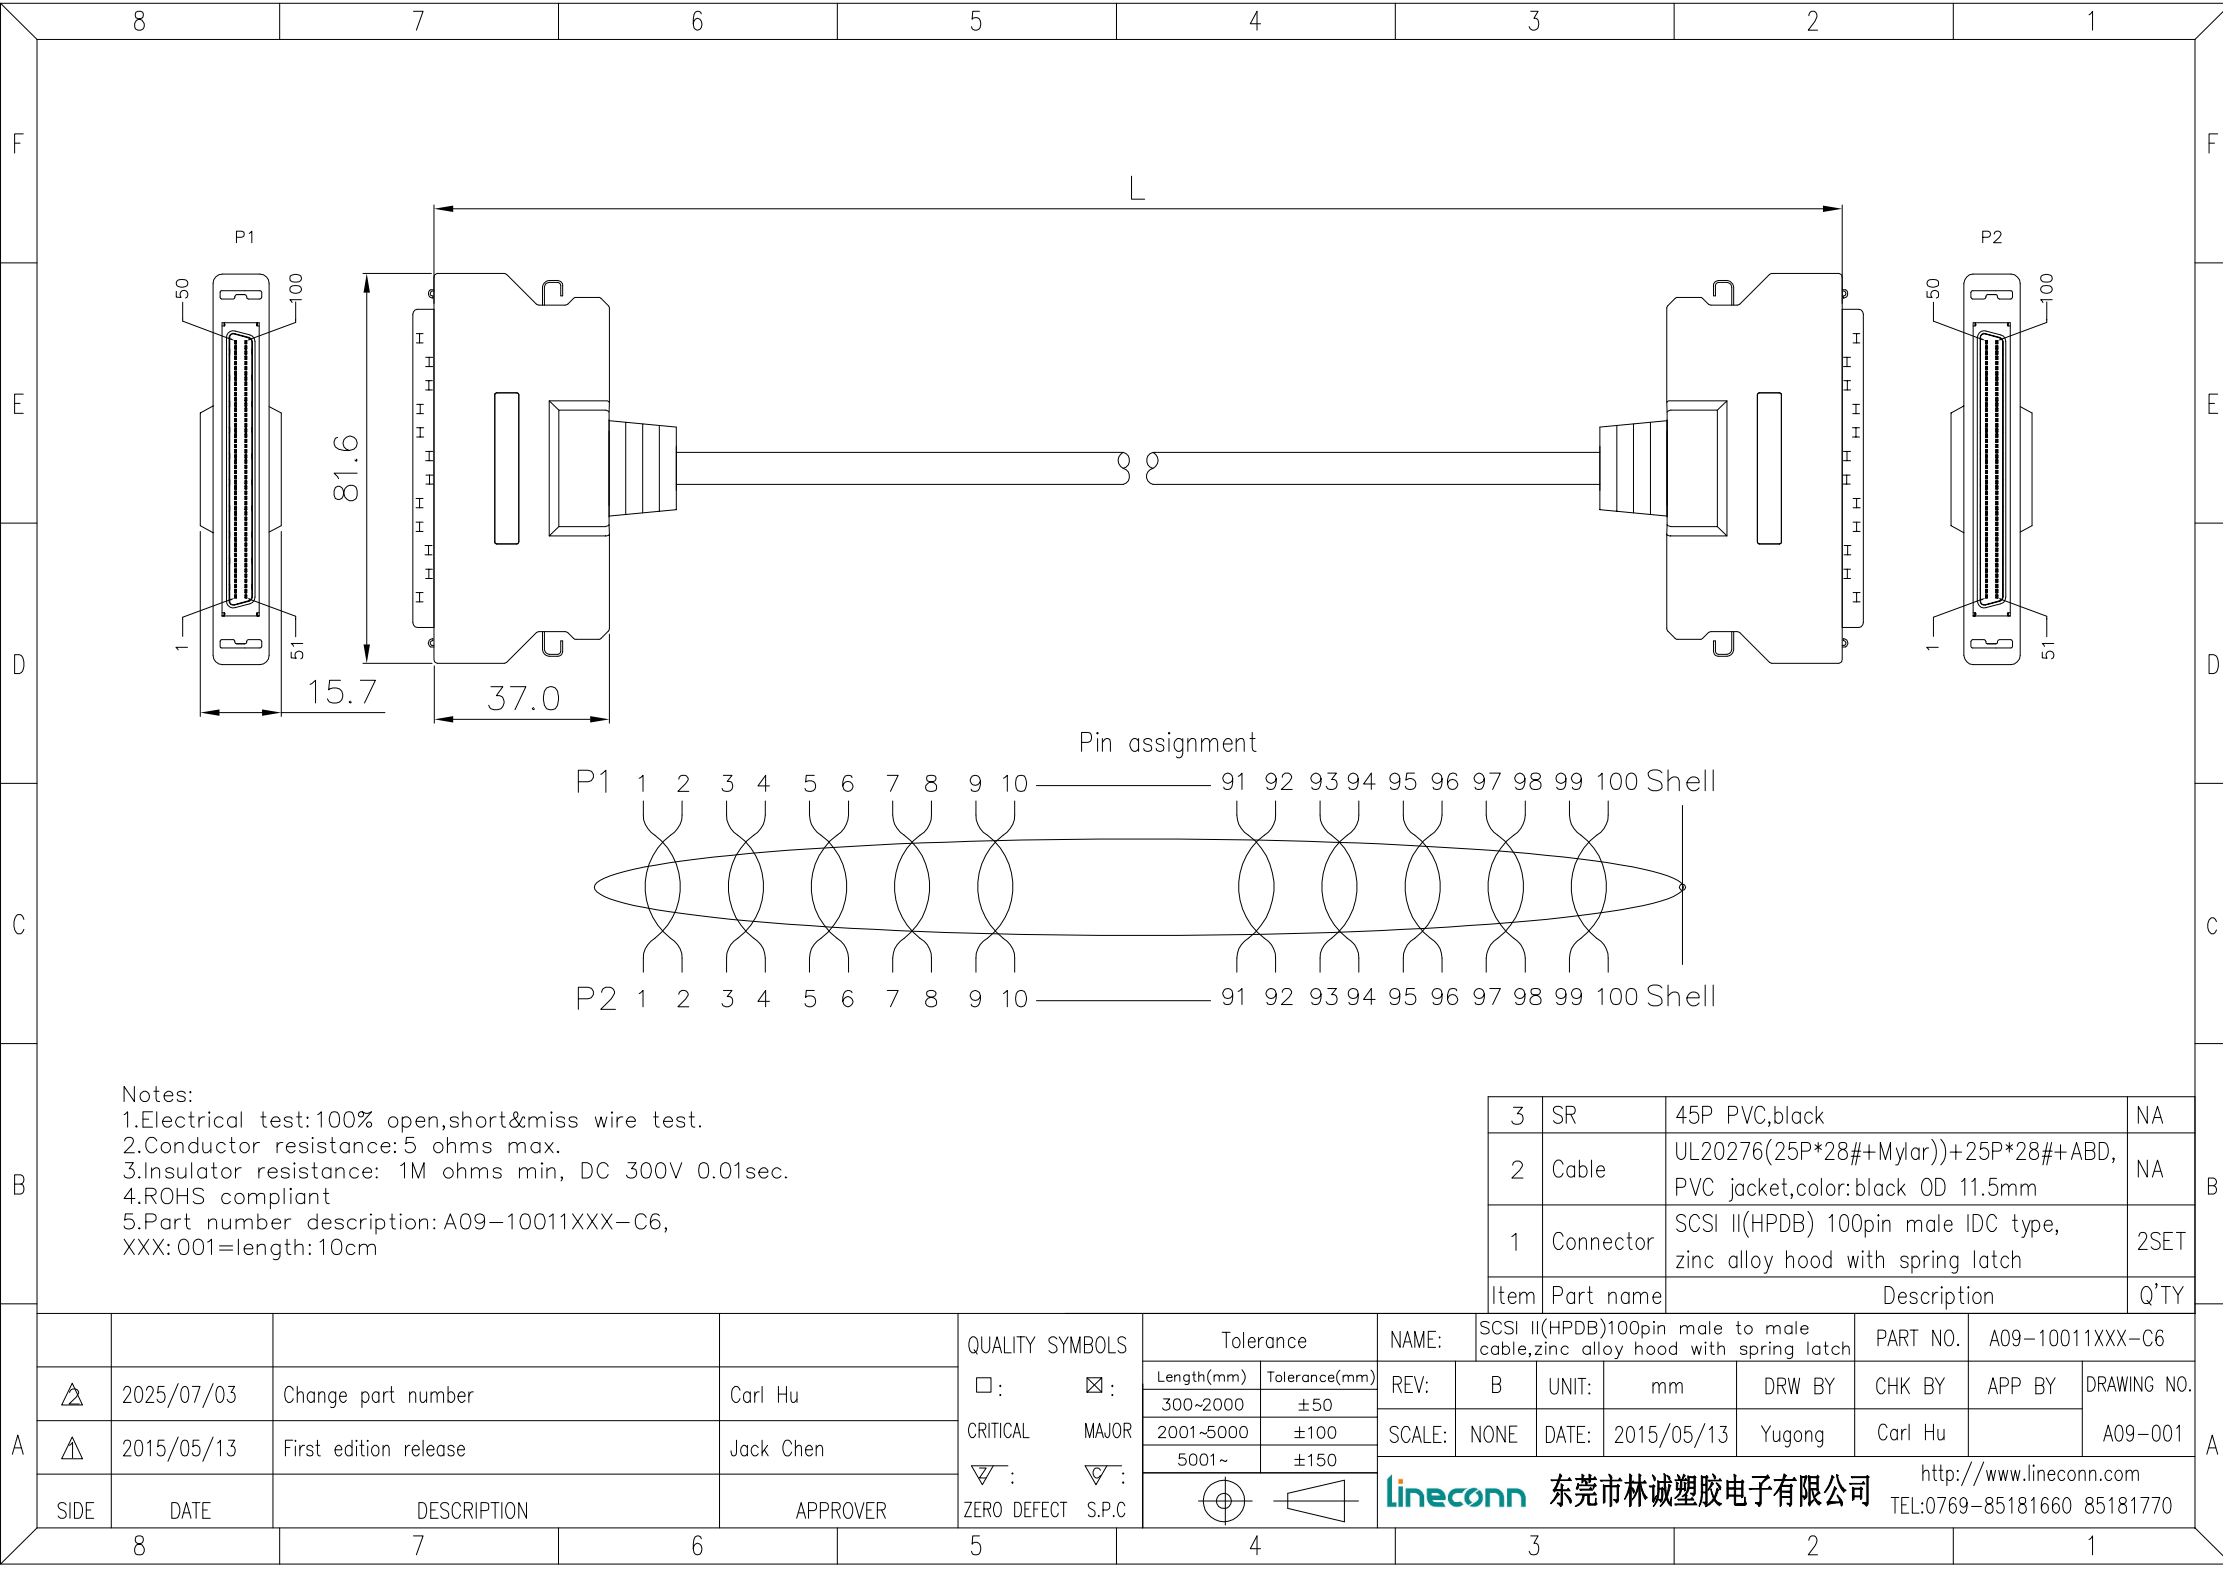

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5 ohms max.
3.Insulator resistance: 1M ohms min, DC 300V 0.01sec.
4.ROHS compliant
5.Part number description: A09-10011XXX-C6,
XXX:001=length:10cm

3	SR	45P PVC,black	NA
2	Cable	UL20276(25P*28#+Mylar))+25P*28#+ABD, PVC jacket,color:black OD 11.5mm	NA
1	Connector	SCSI II(HPDB) 100pin male IDC type, zinc alloy hood with spring latch	2SET
Item	Part name	Description	Q'TY

A				QUALITY SYMBOLS	Tolerance		NAME:		SCSI II(HPDB)100pin male to male cable,zinc alloy hood with spring latch				PART NO.		A09-10011XXX-C6	
	△	2025/07/03	Change part number	Carl Hu	□ :	☒ :	Length(mm)	Tolerance(mm)	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2015/05/13	First edition release	Jack Chen	CRITICAL	MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2015/05/13	Yugong	Carl Hu		A09-001
							2001~5000	±100								
							5001~	±150								
SIDE	DATE	DESCRIPTION		APPROVER	▽ : ZERO DEFECT	▽ : S.P.C			lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
8			7	6	5		4		3			2		1		