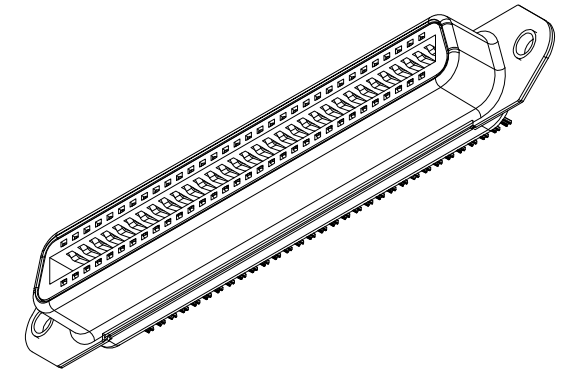

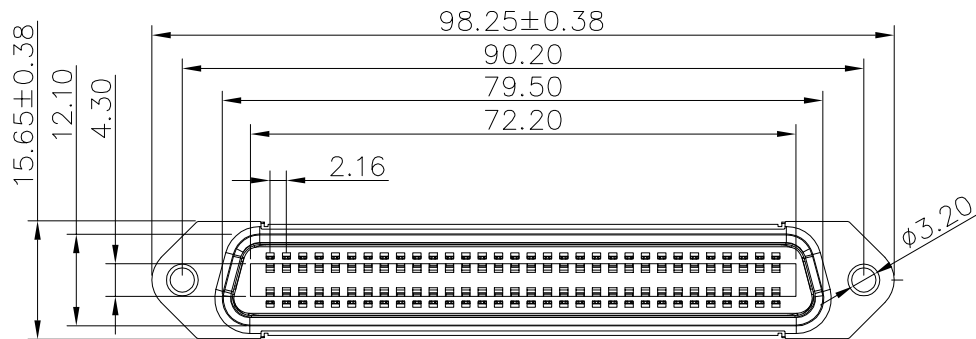


Current rating:1A
Withstanding voltage:250V AC
Contact resistance : 30mΩ max.
Insulation resistance:1000MΩ Min.
Temperature range: -55℃ to +105℃
ROHS compliant
Part number:
B17-0644X1A0-M6
Housing color: _____
1: Black
6: Blue

3	Housing	PBT+G.F.30%	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2022/10/29	First edition release	Carl Hu

QUALITY SYMBOLS

□: ☒:

CRITICAL MAJOR

▽: ▽:


ZERO DEFECT S.P.C

Tolerance

.x ±0.60

.x ±0.40

.xx ±0.25



NAME:

Centronics(57) 64pin female solder, flat shell

REV:

A

SCALE:

N:1

UNIT:

mm

DATE:

2022/10/29

DRW BY

Huangmei

CHK BY

Carl Hu

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL:0769-85181660 85181770

PART NO.

B17-0644X1A0-M6

APP BY

B17-052

DRAWING NO.

B17-052