
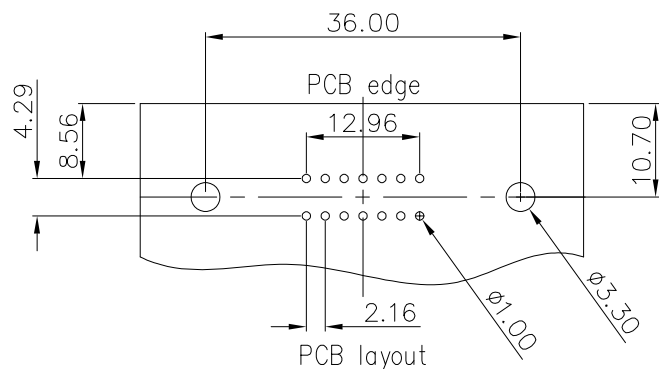
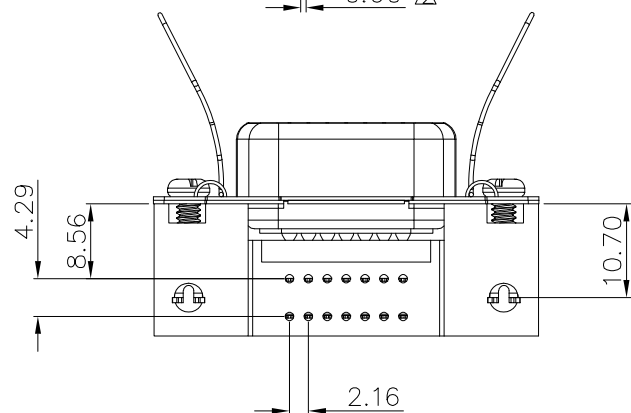
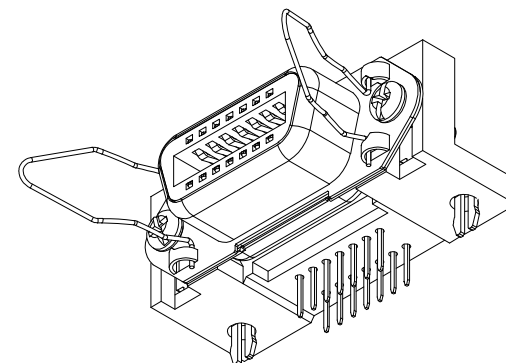
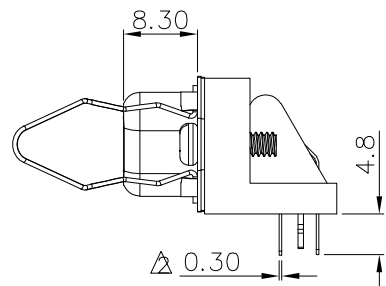


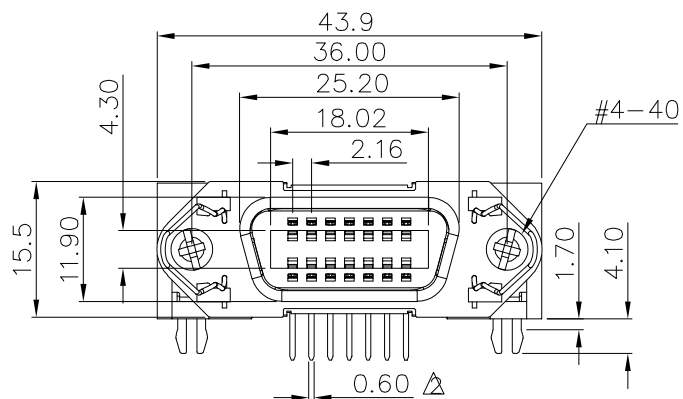

Current rating: 5A
Withstanding voltage: 250V AC
Contact resistance : 30mΩ max.
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +105℃
ROHS compliant
Part number:
B17-0146X1A0-02
Housing color: _____
1: Black
6: Blue

6	Spring loaded buckle	Steel	Plating: Ni
5	Screw	Steel	Plating: Ni
4	Board lock	SPCC	Plating: Sn
3	Housing	PBT+G.F.30%	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME:	Centronics(57) 14pin female right angle for PCB			PART NO.	B17-0146X1A0-02		
△	2026/08/04	Increase the size	Carl Hu	□: ☒:	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2022/12/04	First edition release	Carl Hu	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2022/12/04	Huangmei	Carl Hu		B17-066
				▽: ▽:	.xx ±0.25								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C			lineconn 东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL:0769-85181660 85181770			